

AD-A128 398


SITE CHARACTERIZATION FOR PROBABILISTIC GROUND SHOCK
PREDICTIONS(U) ARMY ENGINEER WATERWAYS EXPERIMENT
STATION VICKSBURG MS STRUCTURES LAB J G JACKSON JUL 82
WES/MP/SL-82-8


1/1

UNCLASSIFIED

F/G 19/4

NL

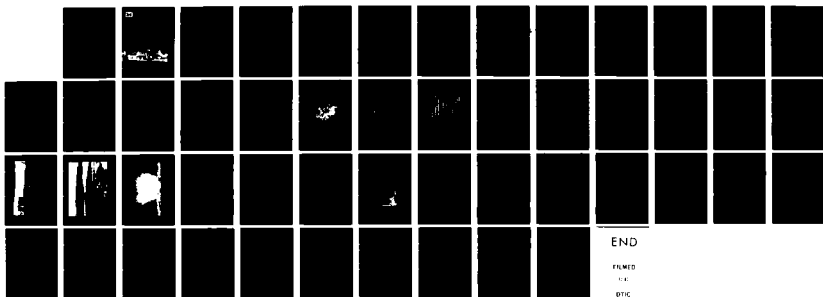



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A120398



12



MISCELLANEOUS PAPER SL-82-8

SITE CHARACTERIZATION FOR PROBABILISTIC GROUND SHOCK PREDICTIONS

by


J. G. Jackson, Jr.

Structures Laboratory

U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

July 1982
Final Report

Approved For Public Release; Distribution Unlimited

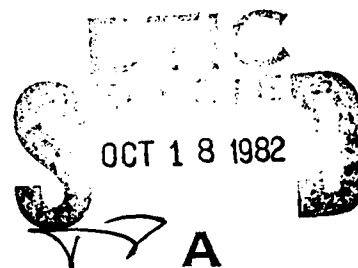

Prepared for Defense Nuclear Agency
Washington, D. C. 20305

Under Task H53BAXSX, Work Unit 00014

82 10 18 104

FILE

Destroy this report when no longer needed. Do not return
it to the originator.

The findings in this report are not to be construed as an official
Department of the Army position unless so designated
by other authorized documents.

The contents of this report are not to be used for
advertising, publication, or promotional purposes.
Citation of trade names does not constitute an
official endorsement or approval of the use of
such commercial products.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM								
1. REPORT NUMBER Miscellaneous Paper SL-82-8	2. GOVT ACCESSION NO. AD-A120398	3. RECIPIENT'S CATALOG NUMBER								
4. TITLE (and Subtitle) SITE CHARACTERIZATION FOR PROBABILISTIC GROUND SHOCK PREDICTIONS		5. TYPE OF REPORT & PERIOD COVERED Final report								
		6. PERFORMING ORG. REPORT NUMBER								
7. AUTHOR(s) J. G. Jackson, Jr.		8. CONTRACT OR GRANT NUMBER(s)								
9. PERFORMING ORGANIZATION NAME AND ADDRESS U. S. Army Engineer Waterways Experiment Station Structures Laboratory P. O. Box 631, Vicksburg, Miss. 39180		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DNA Task H53BAXSX, Work Unit 00014								
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency Washington, D. C. 20305		12. REPORT DATE July 1982								
		13. NUMBER OF PAGES 45								
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified								
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE								
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.										
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)										
18. SUPPLEMENTARY NOTES Available from National Technical Information Service, 5285 Port Royal Road, Springfield, Va. 22151. This paper is essentially a presentation given during the Defense Nuclear Agency Strategic Structures Division Review Conference held at SRI International, Menlo Park, Calif., 4-6 May 1982.										
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)										
<table border="0"> <tr> <td>Dynamic in-situ compressibility tests</td> <td>Site characterization</td> </tr> <tr> <td>4X horizontal shelters</td> <td>Soil compressibility</td> </tr> <tr> <td>Nevada-Utan siting area</td> <td>Vertical particle velocity</td> </tr> <tr> <td>Probabilistic ground shock predictions</td> <td>Vertical rattlespace</td> </tr> </table>			Dynamic in-situ compressibility tests	Site characterization	4X horizontal shelters	Soil compressibility	Nevada-Utan siting area	Vertical particle velocity	Probabilistic ground shock predictions	Vertical rattlespace
Dynamic in-situ compressibility tests	Site characterization									
4X horizontal shelters	Soil compressibility									
Nevada-Utan siting area	Vertical particle velocity									
Probabilistic ground shock predictions	Vertical rattlespace									
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)										
<p>The codes that are currently used to calculate explosive-produced ground shock environments are deterministic tools; i.e., their input parameters are specified as single-valued "representative" quantities. This procedure, which inherently assumes that the calculated ground shock output will be mean-valued "best estimates," is questionable since many of these input parameters (such as the earth material properties and the applied blast loading characteristics)</p> <p style="text-align: right;">(Continued)</p>										

DD FORM 1473

EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued)

are random variables. Thus the resulting state of stress and ground motion are also random variables, and the ground shock calculation problem should be treated probabilistically.

→ A probabilistic methodology is described for determining the statistical distribution of vertical rattlespace required for MX multiple protective shelters sited within the alluvial valleys of central Nevada and eastern Utah. The approach involves (a) identifying the critical ground motion parameters and the input quantities which dominate their calculation, (b) conducting field and laboratory investigations to define the statistical variation of these quantities within the siting area, and (c) performing ground motion calculations with a probabilistic wave propagation code. Calculations for the high-explosive Dynamic In-Situ Compressibility (DISC) tests conducted in Ralston Valley, Nevada, are used to illustrate the probabilistic methodology. ←

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

PREFACE

This paper was prepared to document a presentation given during Session III--Cratering, Ejecta, Ground Shock--of the Defense Nuclear Agency (DNA) Strategic Structures Division Review Conference held at SRI International, Menlo Park, California, on 4-6 May 1982.

The purpose of the presentation was to outline the site characterization methodology developed for DNA in support of the Air Force MX Multiple Protective Shelter program and to illustrate some recently developed probabilistic ground shock prediction and analysis tools. The presentation was prepared by Dr. J. G. Jackson, Jr., and his associates in the Geomechanics Division of the Structures Laboratory (SL), U. S. Army Engineer Waterways Experiment Station (WES).

Mr. Bryant Mather was Chief of SL during the preparation of this paper. The Commander and Director of WES was COL Tilford C. Creel, CE, and the Technical Director was Mr. F. R. Brown.



CONTENTS

	<u>Page</u>
PREFACE	1
CONVERSION FACTORS, NON-SI TO SI (METRIC)	
UNITS OF MEASUREMENT	3
SITE CHARACTERIZATION FOR PROBABILISTIC	
GROUND SHOCK PREDICTIONS	4
REFERENCES	10
VIEWGRAPHS 1-25	

CONVERSION FACTORS, NON-SI TO SI (METRIC)
UNITS OF MEASUREMENT

Non-SI units of measurement used in this paper can be converted to SI (metric) units as follows:

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
feet	0.3048	meters
inches	0.0254	meters
pounds (mass)	0.45359237	kilograms
square miles (U. S. statute)	2.589998	square kilometers

SITE CHARACTERIZATION FOR PROBABILISTIC GROUND SHOCK PREDICTIONS

Viewgraph 1

The codes that we currently use to calculate explosive-produced ground shock environments are deterministic tools; i.e., their input parameters are specified as single-valued quantities. But in reality, much of this input--such as the earth material properties and the applied blast loading characteristics--are random variables, which means that the resulting state of stress and ground motion are also random variables. Thus, the ground shock calculation problem should be treated probabilistically.

There is nothing new about that conclusion--a probabilistic approach to ground shock prediction has long been recognized as the ideal way to go. But it took the ill-fated MX Multiple Protective Shelter (MPS) concept to convince us that it is the only way to go.

Viewgraph 2

Geologic profile and soil property estimates related to our land-based ICBM systems are usually provided on a site-specific basis. Titan involved only 18 sites within each of three relatively compact deployment areas. Site-by-site characterization for Minuteman was much more difficult--involving 150 to 200 sites in each of six areas--but it was still manageable. But when the Air Force proposed playing a "shell game" with 4600 shelters scattered over an 8000- to 9000-square-mile* area of Nevada and Utah, a probabilistic approach was no longer nice--it was absolutely necessary.

Viewgraph 3

The Nevada-Utah siting area for MX/MPS consisted of 47 alluvial valleys of the Basin and Range physiographic province. Soil deposits that result from similar geologic processes and have similar composition (such as density, water content, and gradation) generally have similar engineering properties (such as compressibility and shear strength). So our site characterization approach was to quantify the variability of the key ground shock-relevant geotechnical properties within one of these valleys and then statistically correlate the results with parameters which could readily be measured in the other 46 valleys.

The question then was "What are the key ground shock-relevant geotechnical properties?" The answer, of course, depends on the designer's problem.

* A table of factors for converting non-SI units of measurement to SI (metric) units is presented on page 3.

Viewgraph 4

BMO said that the amount of vertical rattlespace--defined as the maximum relative displacement between the shelter and a free-falling missile--was a major cost driver, and wanted a statistical distribution of this requirement for the Nevada-Utah area. Rigid-body motion of the horizontal MX shelter can be approximated by the free-field vertical ground motion at the invert depth, which is dominated by the airslap impulse and the uniaxial strain compressibility of the dry alluvial soil above the first major reflector--usually either the groundwater table or bedrock. But groundwater tables and bedrock can be quite deep in the Nevada-Utah valleys, so determining the compressibility of all of the dry alluvium in them would still have been quite a job. We were fortunate, however, in that a series of sensitivity calculations showed that vertical rattlespace for the MX horizontal shelter problem was unaffected by anything below a depth of 150 feet.

With the above as a background, we developed a program to address the rattlespace issue.

Viewgraph 5

The time driver for the program was the date required for B-4 Specifications to support design of the horizontal shelter. There were three parts to the program--(1) a detailed study of soil compressibility in Ralston Valley, Nevada, (2) two large high-explosive Dynamic In Situ Compressibility (or DISC) tests in Ralston Valley, and (3) acquisition of seismic velocity and other geotechnical data from eight valleys that were statistically distributed across the siting area.

Viewgraph 6

The Ralston Valley Soil Compressibility Study was a statistical study of one valley to generate baseline data applicable to other geologically-similar valleys. With the assistance of Professor Erik Vanmarcke of MIT, a probabilistic sampling and testing program was designed (Reference 1) to define the valley-wide variation of uniaxial strain compressibility to a depth of 150 feet--and if possible, to correlate compressibility with data that were either already available or could readily be obtained (such as the P-wave velocities from seismic refraction surveys).

Viewgraph 7

Fugro National, Inc. (now Ertec Western, Inc.) defined the suitable siting area for Ralston Valley (Reference 2). Within this area we obtained soil samples and seismic velocity data from four widely-spaced borings at each of 17 locations; at two of these locations, additional soil samples and seismic P-wave data were obtained from a large number of closely-spaced borings (References 3-5). And we conducted DISC tests at 2 of the 17 sites (References 6 and 7).

Viewgraph 8

This viewgraph shows the random variation in static uniaxial strain results from 16 tests conducted on samples from one site--the samples were all extracted from the upper 6 meters from 12 borings that were all drilled within a 6-meter radius (Reference 8). There is substantial variation in the loading data, but very little in the unloading data.

Viewgraph 9

Dynamic uniaxial strain tests were conducted with rise-times to 8 MPa ranging between 3 and 4 msec.

This viewgraph shows the depth-biased variation in dynamic uniaxial strain from eight tests conducted on samples from six different sites--these samples were extracted at 6-meter intervals from a depth of 3 meters down to 46 meters (Reference 8).

Results from over 350 uniaxial strain tests were digitized and stored in a computer data bank along with all the seismic velocity, density, and gradation data (Reference 9). Statistical correlation analyses were then performed.

Viewgraph 10

This viewgraph illustrates the statistical correlation we developed between seismic P-wave velocity and dynamic laboratory compressibility. Given only a seismic velocity and a density, the program computes seismic compressibility and then predicts dynamic lab compressibility. The value of dynamic lab compressibility expected between 1.5 and 5.9 meters at the DISC Test I site is shown with a 90 percent confidence interval.

But what we want to predict is not seismic compressibility or dynamic lab compressibility, but dynamic in-situ compressibility--to do that, we needed the DISC tests.

Viewgraph 11

The DISC test surface loading was produced by a circular explosive charge designed by AFWL--15,000 lbs of Iremite was placed in a 90-foot-diameter cavity and confined by a 10-foot-high soil berm. Ground motions were measured by a double array of accelerometers placed at preselected intervals to a depth of 15 meters. A state of uniaxial strain was produced in the ground to a depth of about 6 meters; lateral restraint on the gages below 6 meters was reduced by relief waves from the cavity edge.

Viewgraph 12

This photograph shows the circular foam-HEST charge being laid out for center detonation.

Viewgraph 13

This photograph shows the soil berm being constructed to confine the charge.

Viewgraph 14

If you have seen one, you have seen them all!

Viewgraph 15

This is a composite plot showing the rise portions of the particle velocity waveforms that were measured in the upper 6 meters of DISC Test I. Wave speeds for different particle velocity amplitudes were computed for each depth interval and one-dimensional plane wave theory used to deduce stress-strain relations.

Viewgraph 16

The average in-situ stress-strain relation that was deduced from the 0- to 6-meter particle velocity wavefront measurements is plotted in this viewgraph for comparison with the seismic and dynamic lab compressibilities that were previously shown in Viewgraph 10.

Now I plan to illustrate some recently developed probabilistic analysis tools by using the DISC Test I data to make a probabilistic ground shock prediction for DISC Test II. We assumed in-situ compressibility in the upper 6 meters of Ralston Valley to be a random variable--and since the curve deduced from the DISC Test I particle velocities is the only dynamic in-situ compressibility relation for Ralston Valley, we assumed it to be the mean relation.

Viewgraph 17

We then used coefficients of variation computed from the lab uniaxial strain loading data to derive standard deviation bounds for the in-situ uniaxial strain loading relation. As previously shown, there was very little variation in the lab unloading stress-strain data, so we used a constant unloading relation in the probabilistic calculations. Soil density was also input as a constant, since its coefficient of variation was only about 5 percent.

There were only two random variables in the calculations--the in-situ compressibility relation and the airblast loading function. The explosive charge design for DISC Test II was identical to that for DISC

Test I, so we used the DISC Test I data to define airblast variability for the DISC Test II predictions.

Viewgraph 18

This viewgraph shows the nine blast pressure measurements for DISC Test I. But it is the airblast impulse that primarily affects particle velocity at depth, so we statistically analyzed the nine impulse plots obtained by integrating the DISC Test I blast pressure measurements--

Viewgraph 19

and produced this mean impulse function and its standard deviation bounds. Airblast pressure drivers for the probabilistic 1D calculations were then obtained by differentiation.

We have two probabilistic analysis codes--one is based on the method of partial derivatives described by Benjamin & Cornell (Reference 10); the other uses a point-estimate method published by Rosenblueth in 1975 (Reference 11). When there are n uncorrelated random variables, both methods require $2n+1$ deterministic calculations; since our problem had two independent variables, five 1D calculations were required. We used both methods and obtained essentially identical results.

Viewgraph 20

This viewgraph shows our prediction of particle velocity at the 3-meter depth for DISC Test II. The solid line is the expected value obtained from the probabilistic analysis. The dashed-line result was obtained from a 1D calculation in which mean values were used for all input variables--and is akin to the "best estimate" we would obtain using "representative" properties for input. While in this case the difference is small, it does illustrate the fact that simply using average or mean input does not necessarily lead to the most probable solution.

But a probabilistic analysis does a lot more than just provide expected values--it also provides information about uncertainties.

Viewgraph 21

This viewgraph shows the coefficient of variation associated with the expected value--or the uncertainty of the output due to the combined uncertainties of the input. It also shows--as a percentage--the relative contribution of each input uncertainty to the overall output uncertainty.

Note that the largest uncertainties are associated with the rise portion of the particle velocity waveform and are due almost entirely to

uncertainty in soil compressibility--uncertainty in the airblast impulse has very little effect on rise time. But as time goes on, the airblast impulse contribution steadily increases while the soil compressibility contribution steadily decreases--and it should decrease, because compressibility during unloading was a constant and not a random variable.

Viewgraph 22

This viewgraph shows our DISC Test II prediction compared with the DISC Test II data. The comparison looks pretty good to me, but then beauty is in the eye of the beholder--which leads me to say that we have long needed a less subjective (or prejudiced) way of assessing the degree of agreement or disagreement between computational and experimental results. That is by no means an original conclusion, i.e., at the last one of these conferences (in 1979) Tom Geers of Lockheed Palo Alto said precisely the same thing during an underwater shock session.

Geers suggested an objective method for computing relative differences (or errors) both in magnitude and in phase-and-frequency between two transient response histories (Reference 12). We picked up on it and used it to compare each of the three measured DISC Test II waveforms to the calculated waveform.

Viewgraph 23

This viewgraph shows the magnitude errors and the phase-and-frequency errors computed for each of the three measured waveforms. The errors associated with two of these waveforms are small and essentially identical. They appear to be somewhat larger for the dashed line, but that is really only true during the initial 2- to 3-msec toe (or precursor).

Viewgraph 24

We also compared the mean of the three DISC Test II measurements with the calculated expected value. The magnitude error has a plus-and-minus oscillation during the rise portion and then settles on a value of about minus 10 percent. The phase-and-frequency error is essentially zero.

Viewgraph 25

And finally, for the rattlespace calculations, we were interested in when things started moving at the 3-meter depth, not when the airblast initially loaded the ground surface--so we replotted the expected value of particle velocity in terms of time minus arrival time at 3 meters. We then produced the probabilistic ground shock product of primary interest to all system designers, i.e., confidence intervals about the expected value.

REFERENCES


1. Erik H. Vanmarcke; "Probabilistic Soil Sampling Program for MX-Related Site Characterization"; Miscellaneous Paper SL-79-26, December 1979; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
2. Fugro National, Inc.; "MX Siting Investigation, Geotechnical Summary, Dry Lake Valley and Ralston Valley, Nevada, Great Basin CSP"; Report prepared for Air Force Space and Missile Systems Organization, July 1978; Long Beach, CA.
3. B. R. Phillips; "Ralston Valley Soil Compressibility Study: Interpreted Boring Logs"; April 1981; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
4. Fugro, Inc.; "Refraction Survey Seismic P-Wave Velocities, Ralston Valley, Nevada"; Report prepared for U. S. Army Engineer Waterways Experiment Station, April 1980; Long Beach, CA.
5. Ertec Western, Inc.; "Refraction Survey Seismic P-Wave Velocities, Site REU, Ralston Valley, Nevada"; Report prepared for U. S. Army Engineer Waterways Experiment Station, October 1981; Long Beach, CA.
6. A. E. Jackson, Jr., et al.; "Ralston Valley Soil Compressibility Study: Quick-Look Report for DISC Test I"; May 1981; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
7. A. E. Jackson, Jr., and J. S. Zelasko; "Ralston Valley Soil Compressibility Study: Quick-Look Report for DISC Test II"; January 1982; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
8. B. R. Phillips and A. E. Jackson, Jr.; "Ralston Valley Soil Compressibility Study: Laboratory Test Results"; February 1982; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
9. D. C. Creighton; "Ralston Valley Soil Compressibility Study: Data Base Generation and User's Guide for Computer Program SARFORMS"; September 1981; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, MS.
10. J. R. Benjamin and C. A. Cornell; Probability, Statistics, and Decision for Civil Engineers; 1970; McGraw-Hill Book Company, New York.
11. E. Rosenblueth; "Point Estimates for Probability Moments"; Proceedings National Academy of Science, USA; Vol 72, No. 10, Math., October 1975; pp 3812-3814.

12. T. L. Geers; "Some Recent Developments in Underwater Shock Analysis"; March 1979; DNA Strategic Structures Division Biennial Review Conference, Menlo Park, CA.


**SITE CHARACTERIZATION
FOR
PROBABILISTIC GROUND SHOCK PREDICTIONS**

VIEWGRAPH 1

ICBM BASING



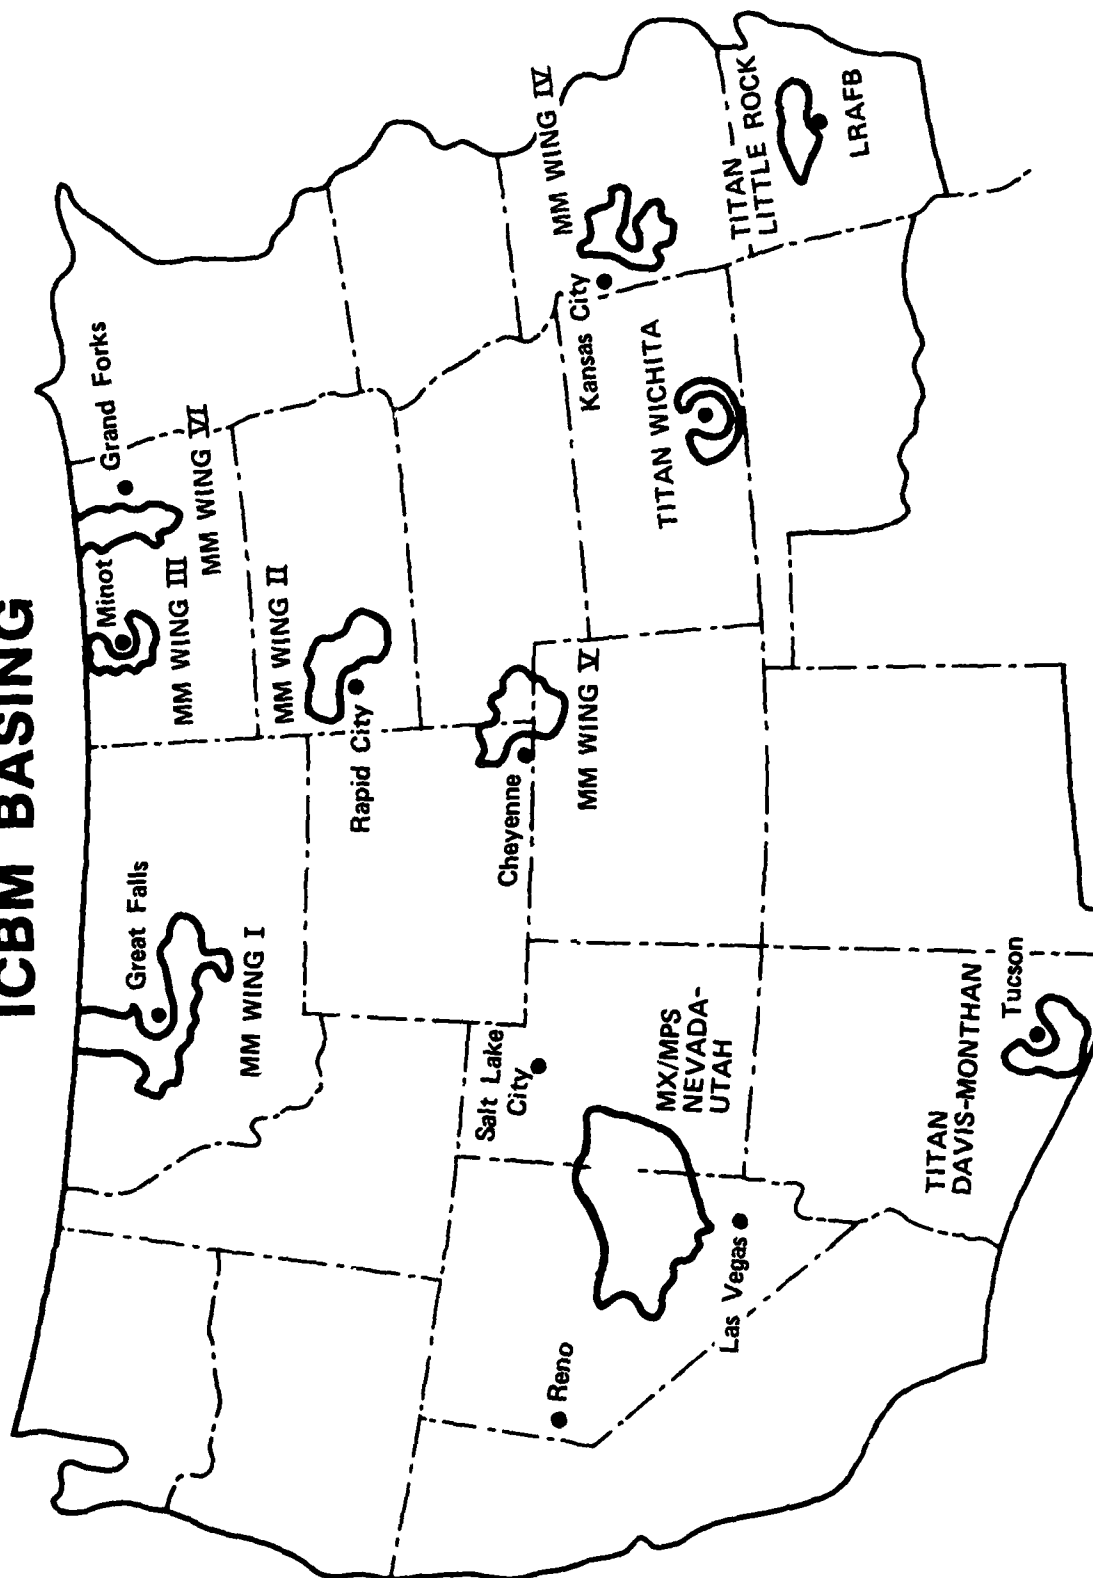


**PROPOSED NEVADA-UTAH SITING AREA FOR MX/MPS
(47 CANDIDATE VALLEYS)**

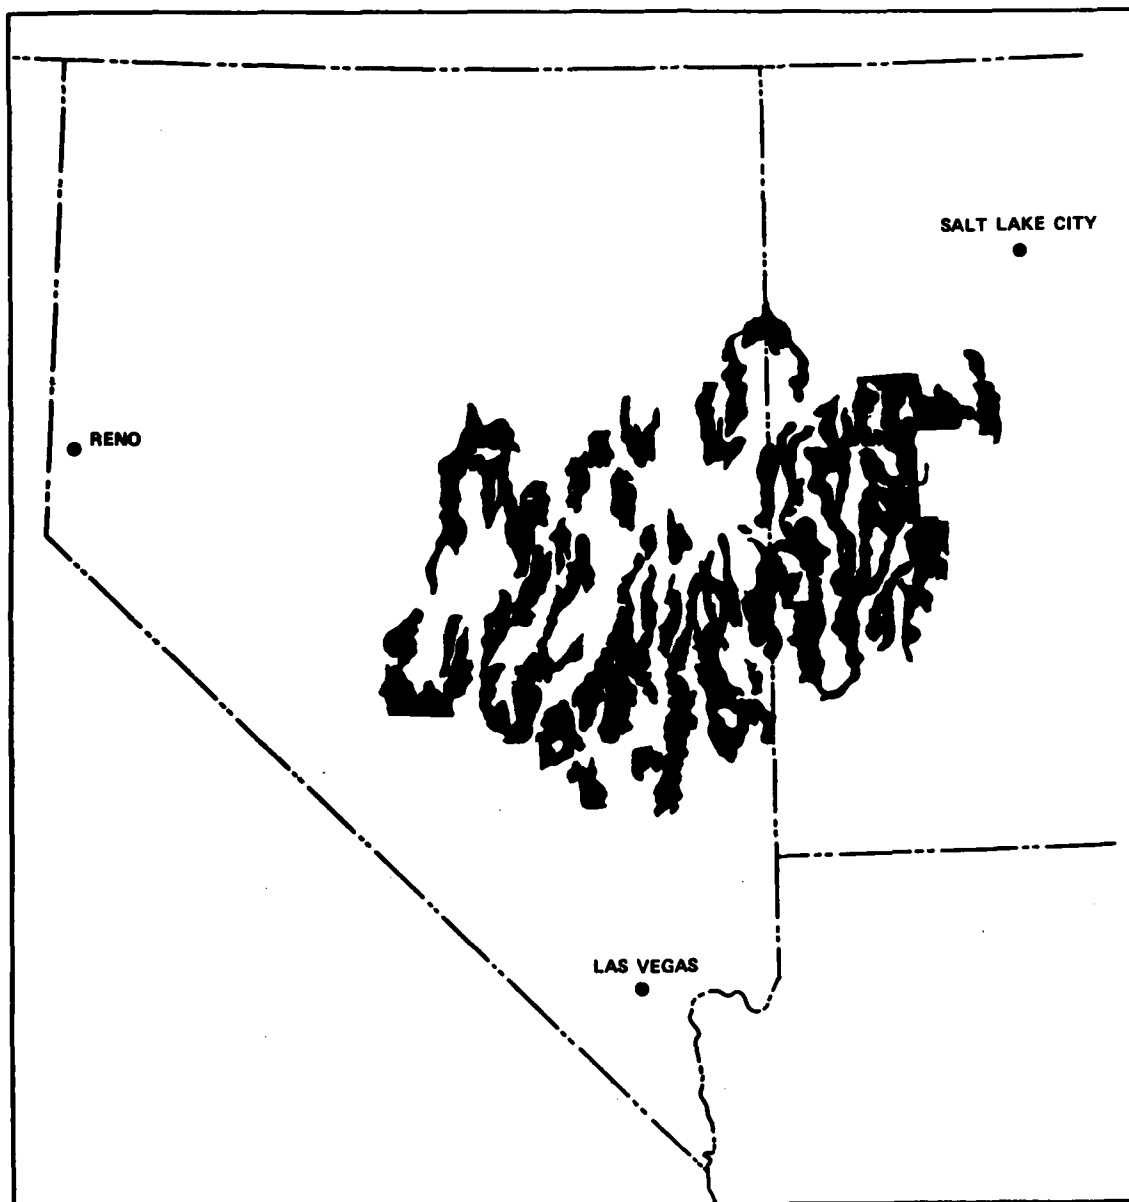


VIEWGRAPH 3

VIEWGRAPH 4

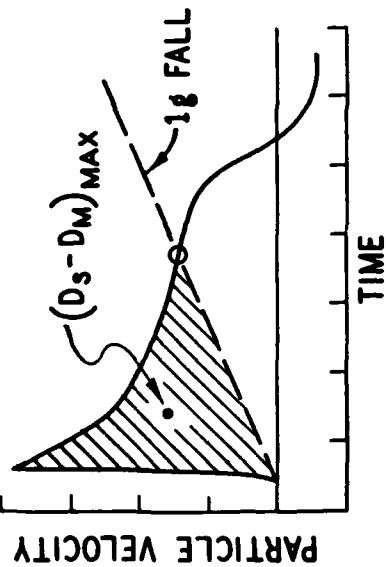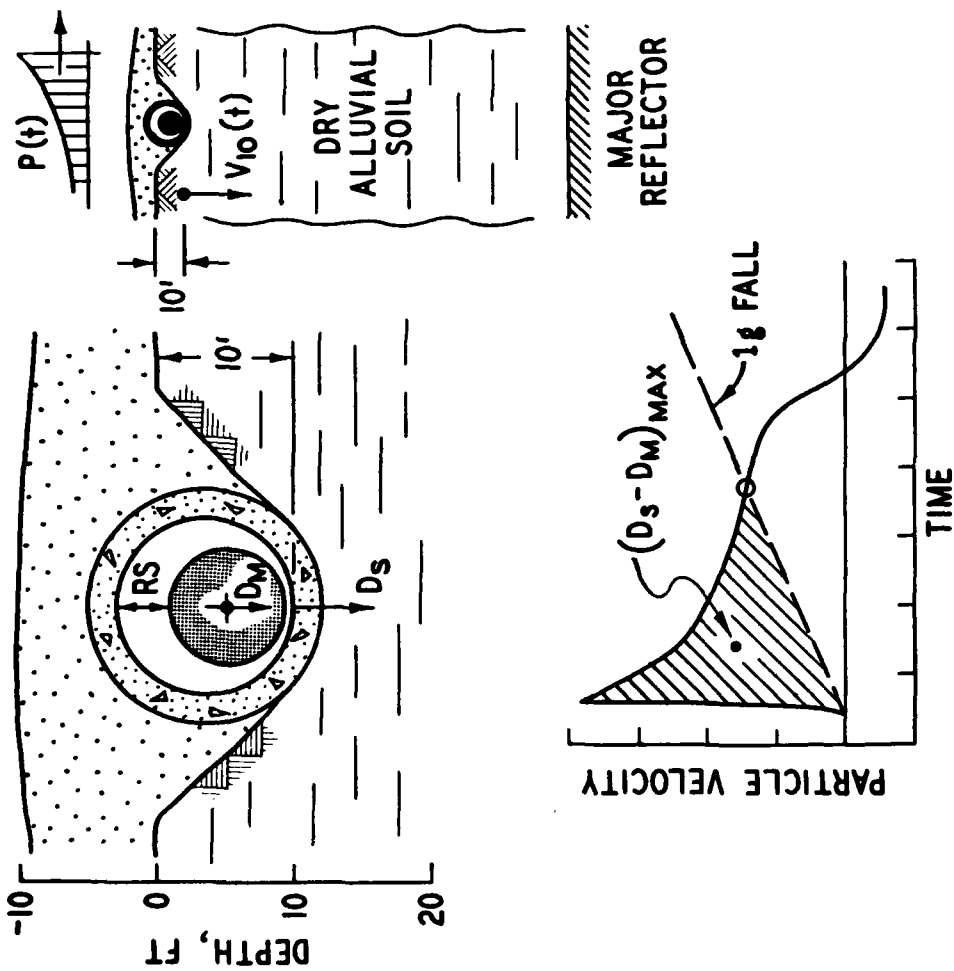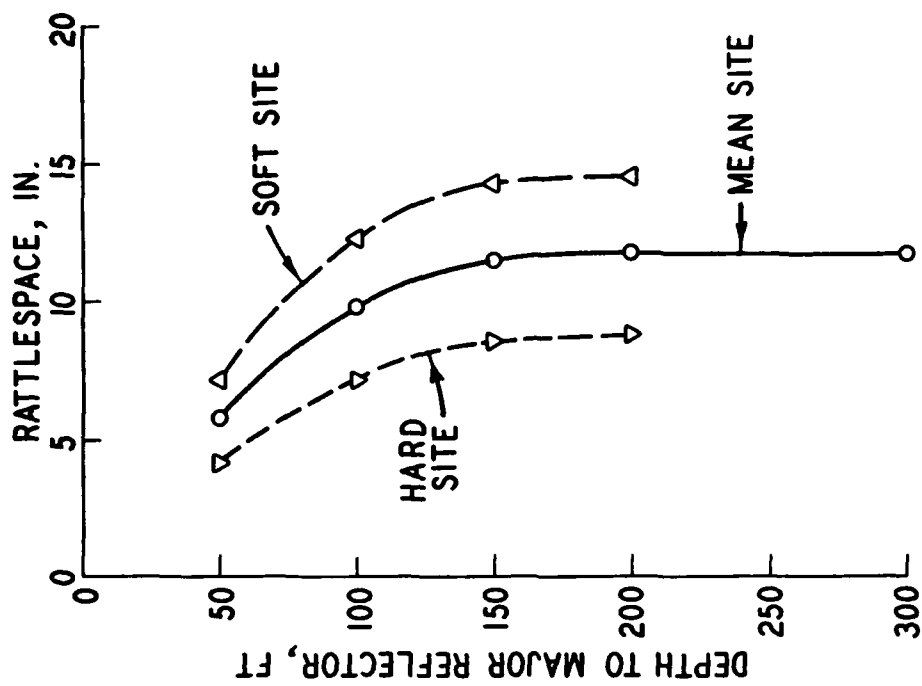

**VERTICAL RATTLESPACE FOR MX HORIZONTAL SHELTERS:
STATISTICAL DISTRIBUTION FOR NEVADA-UTAH DEPLOYMENT AREA**

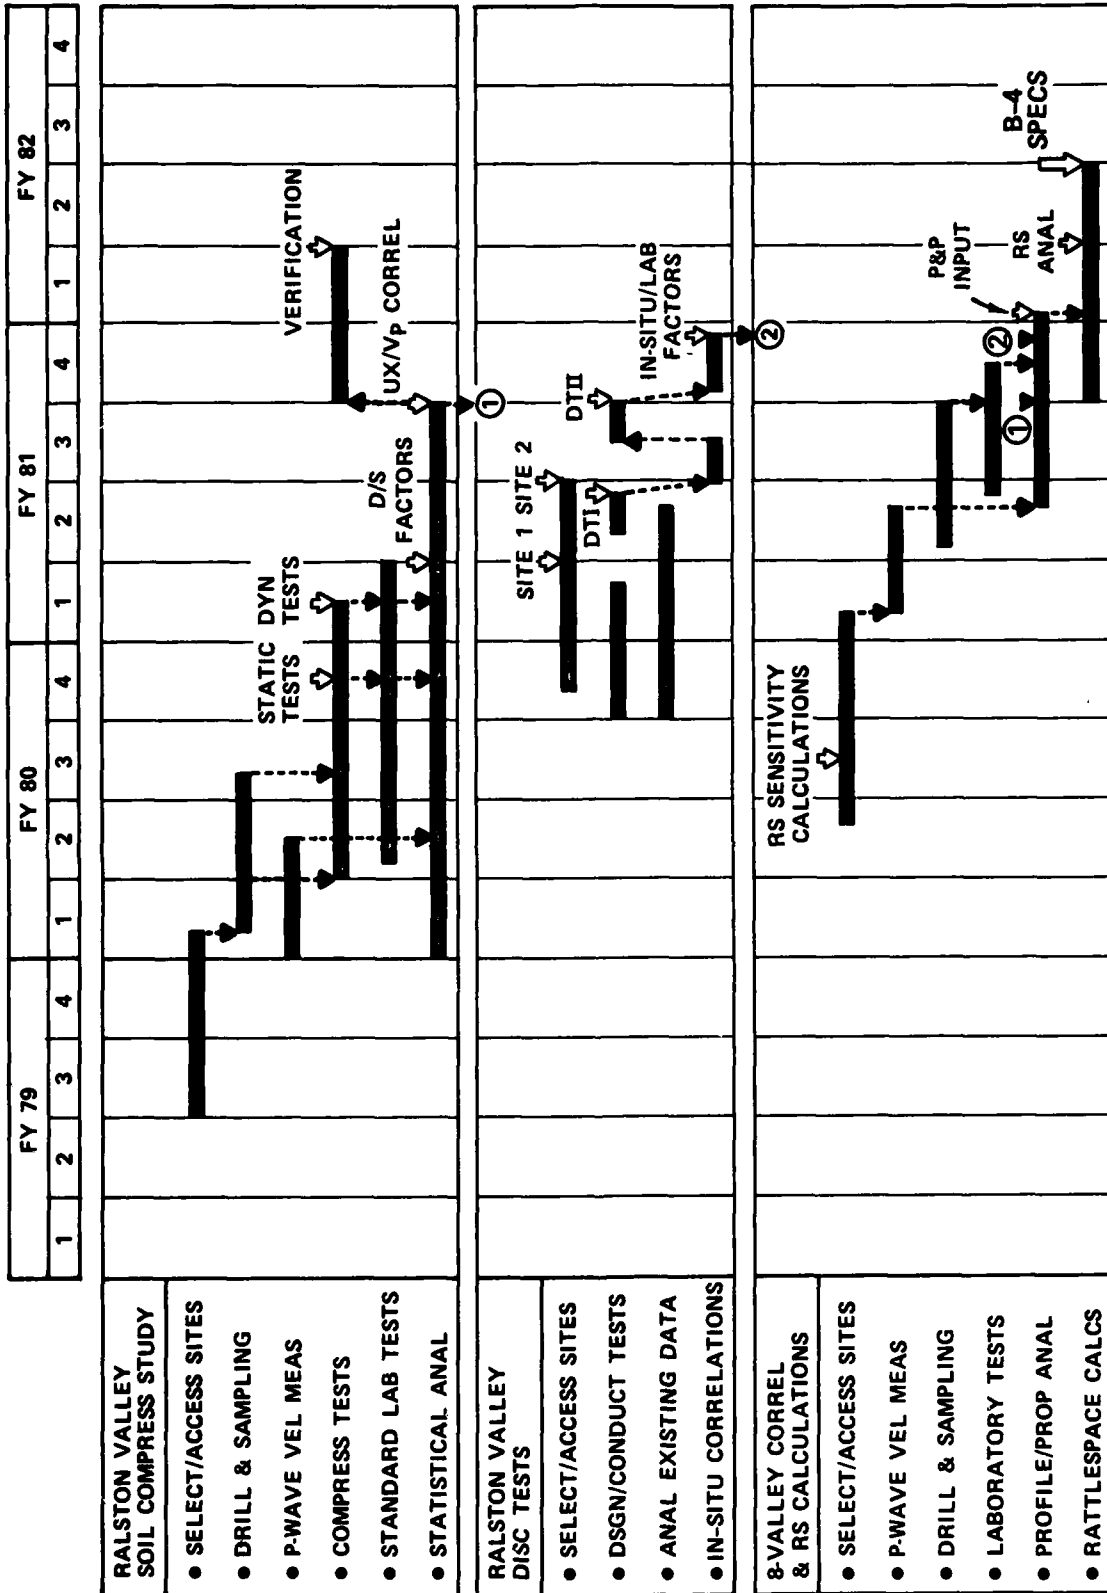

VIEWGRAPH 5

RALSTON VALLEY SOIL COMPRESSIBILITY STUDY


STATISTICALLY ORIENTED STUDY OF RALSTON VALLEY TO GENERATE BASELINE DATA APPLICABLE TO OTHER GEOLOGICALLY SIMILAR VALLEYS

- Probabilistic sampling and testing program designed to yield:

(1) Valley-wide variation of uniaxial strain compressibility to a depth of 150 feet


(2) Correlations with available/more-readily-obtained measurements, for example:

- a. topographic data
- b. surficial geology
- c. seismic refraction P-wave velocity
- d. unified soil classification, gradation curve, etc.
- e. in situ density, porosity, etc.


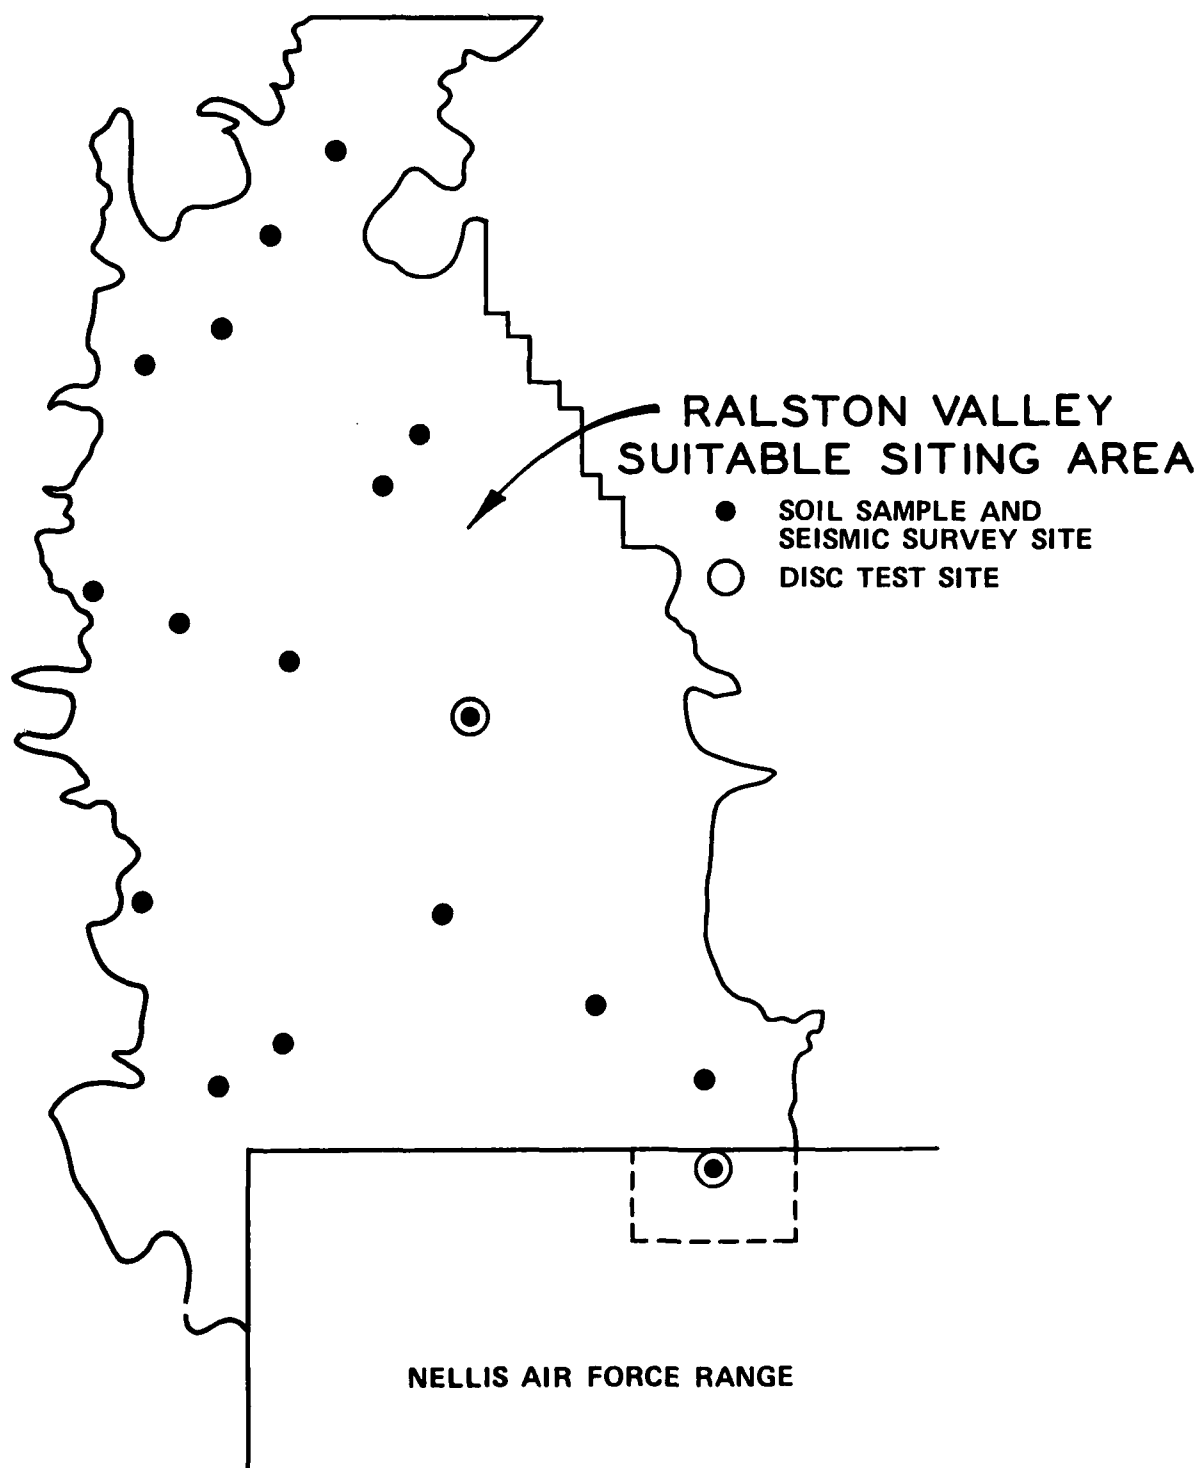


VIEWGRAPH 7

STATIC UNIAXIAL STRAIN TEST RESULTS

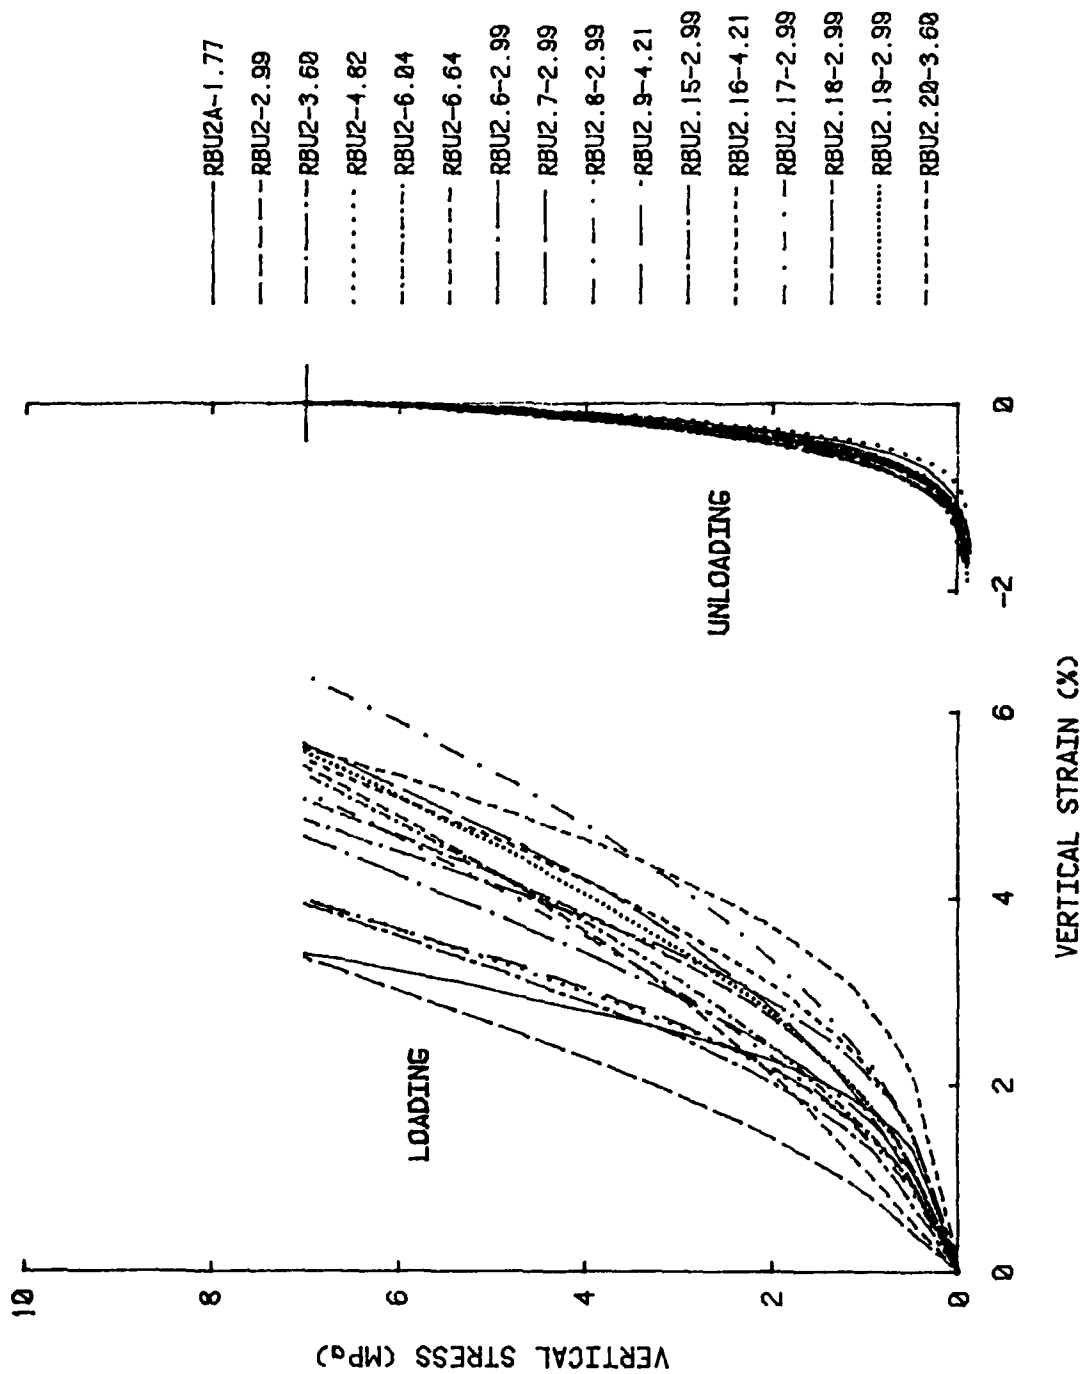

DYNAMIC UNIAXIAL STRAIN TEST RESULTS

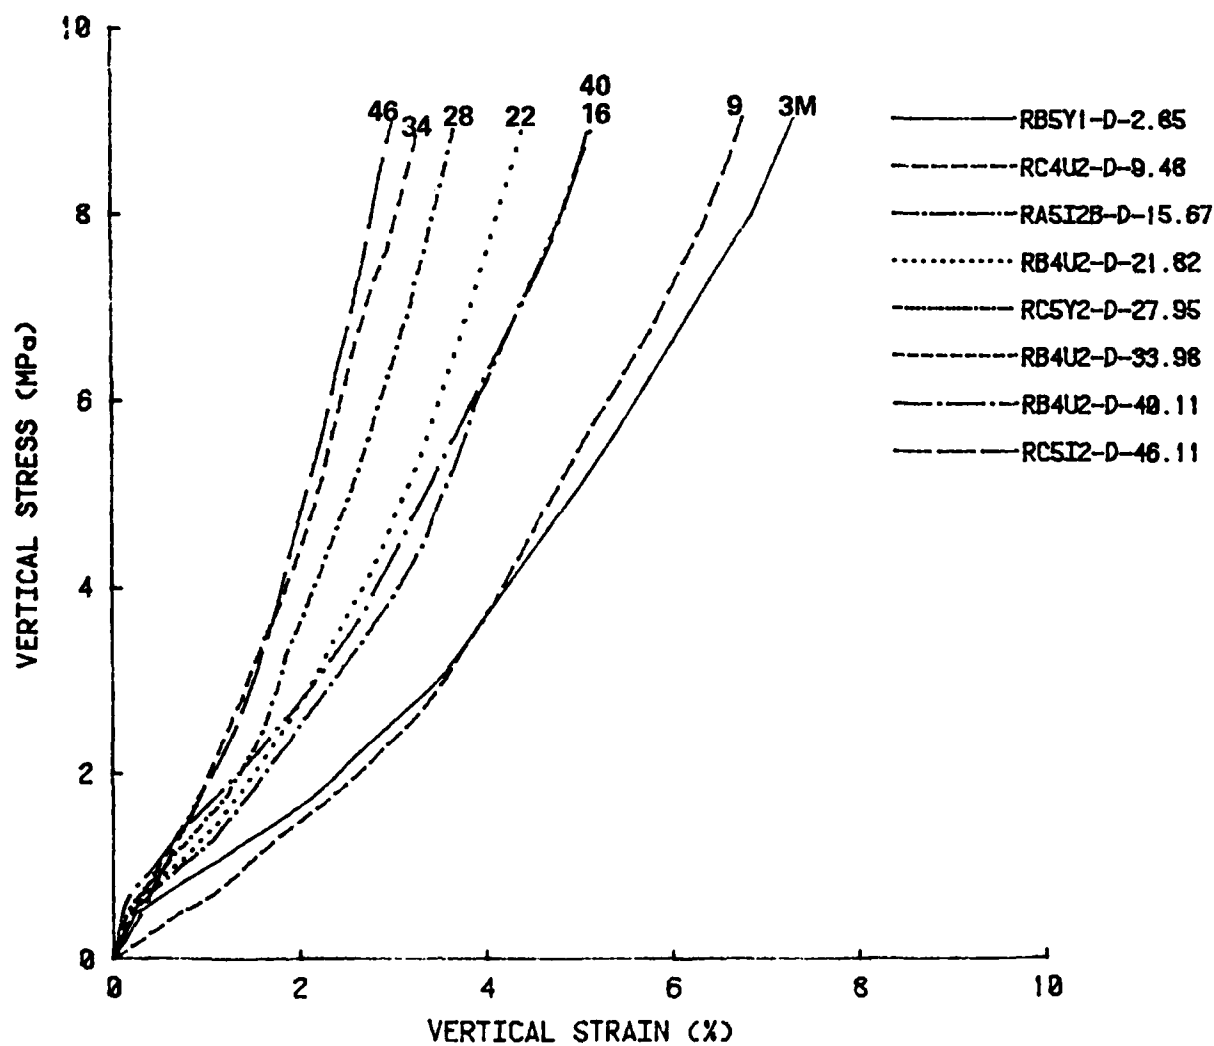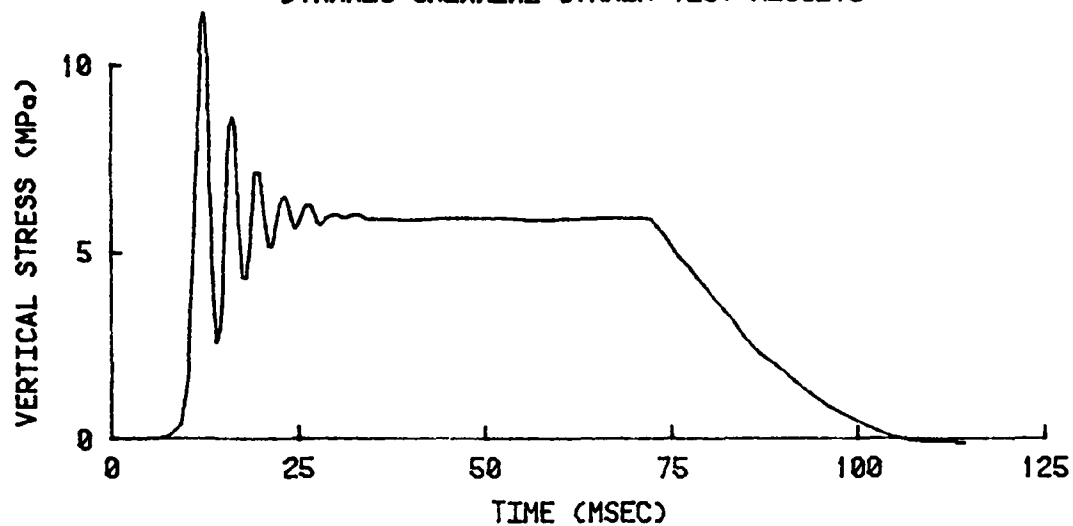

VIEWGRAPH 9


SITE: DISC TEST I

DEPTH INTERVAL: 1.5-5.9 meters

$V_p = 686$ mps


DENSITY = 1.860 g/cc

LEGEND: - - - - - Seismic Compressibility
 - - - - - Expected Value of Dynamic
 Laboratory Compressibility
 - - - - - 90% Confidence Interval about
 Dynamic Lab Expected Value

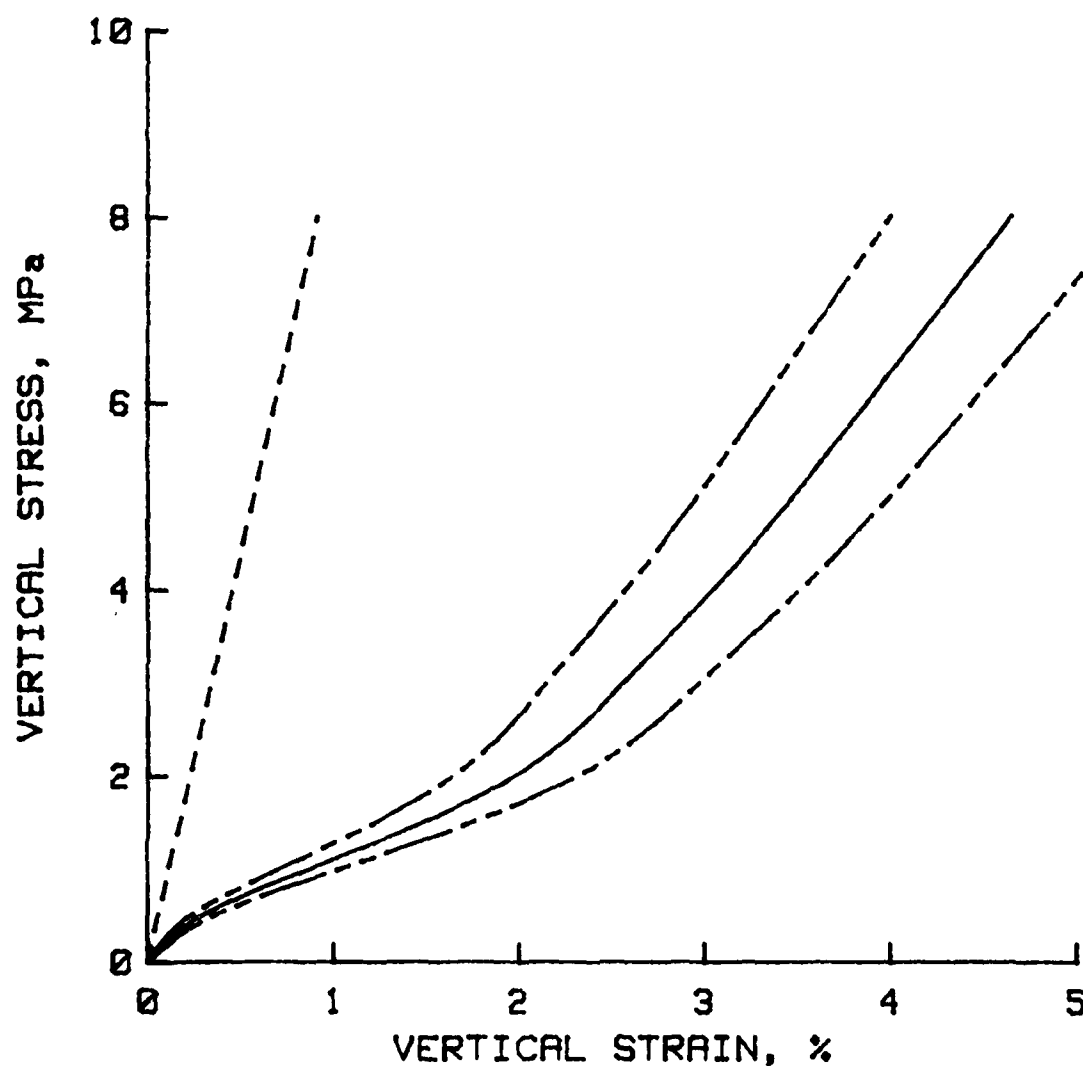

VIEWGRAPH 10

RALSTON VALLEY DISC TEST I

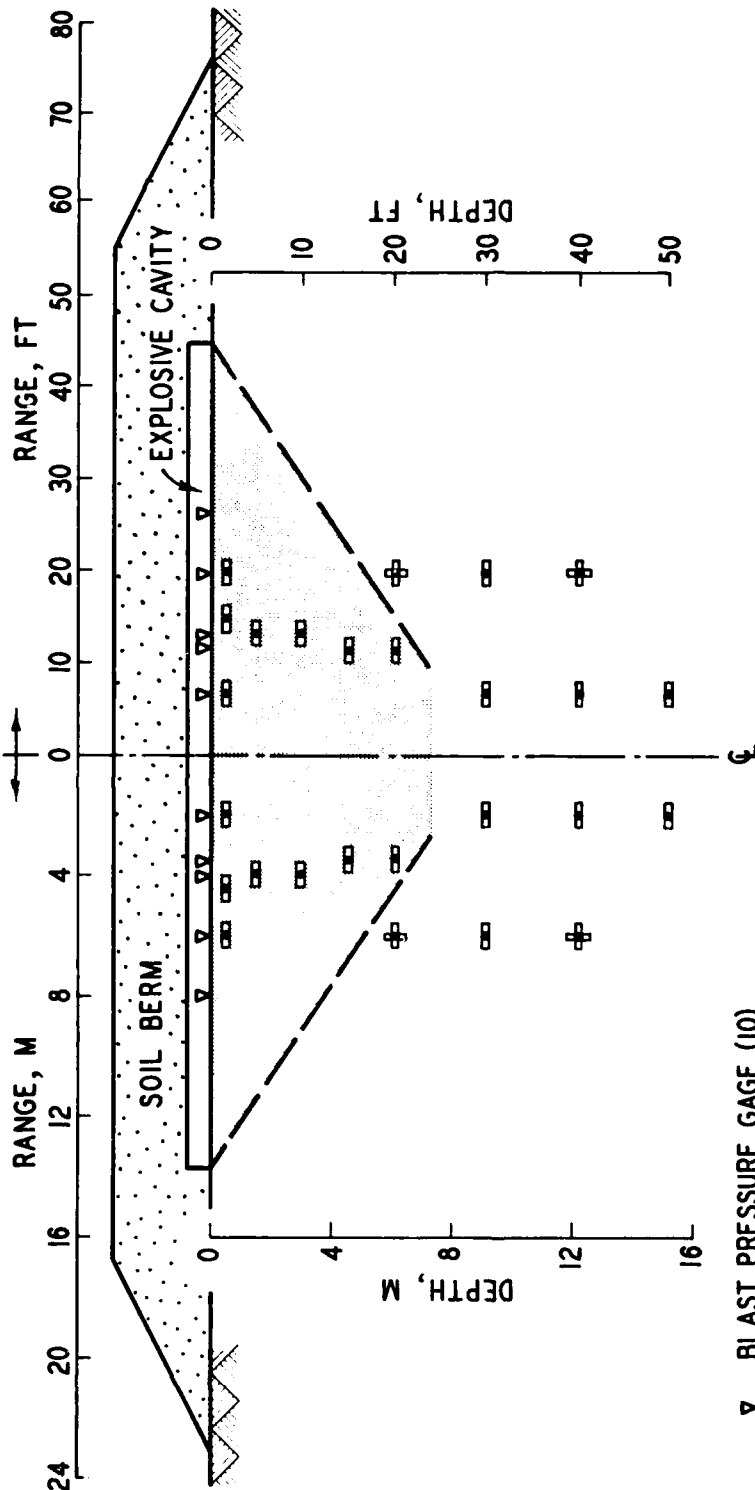

- ▽ BLAST PRESSURE GAGE (10)
- VERTICAL ACCELEROMETER (26)
- ⊞ HORIZONTAL ACCELEROMETER (4)




VIEWGRAPH 12



VIEWGRAPH 13



VIEWGRAPH 14

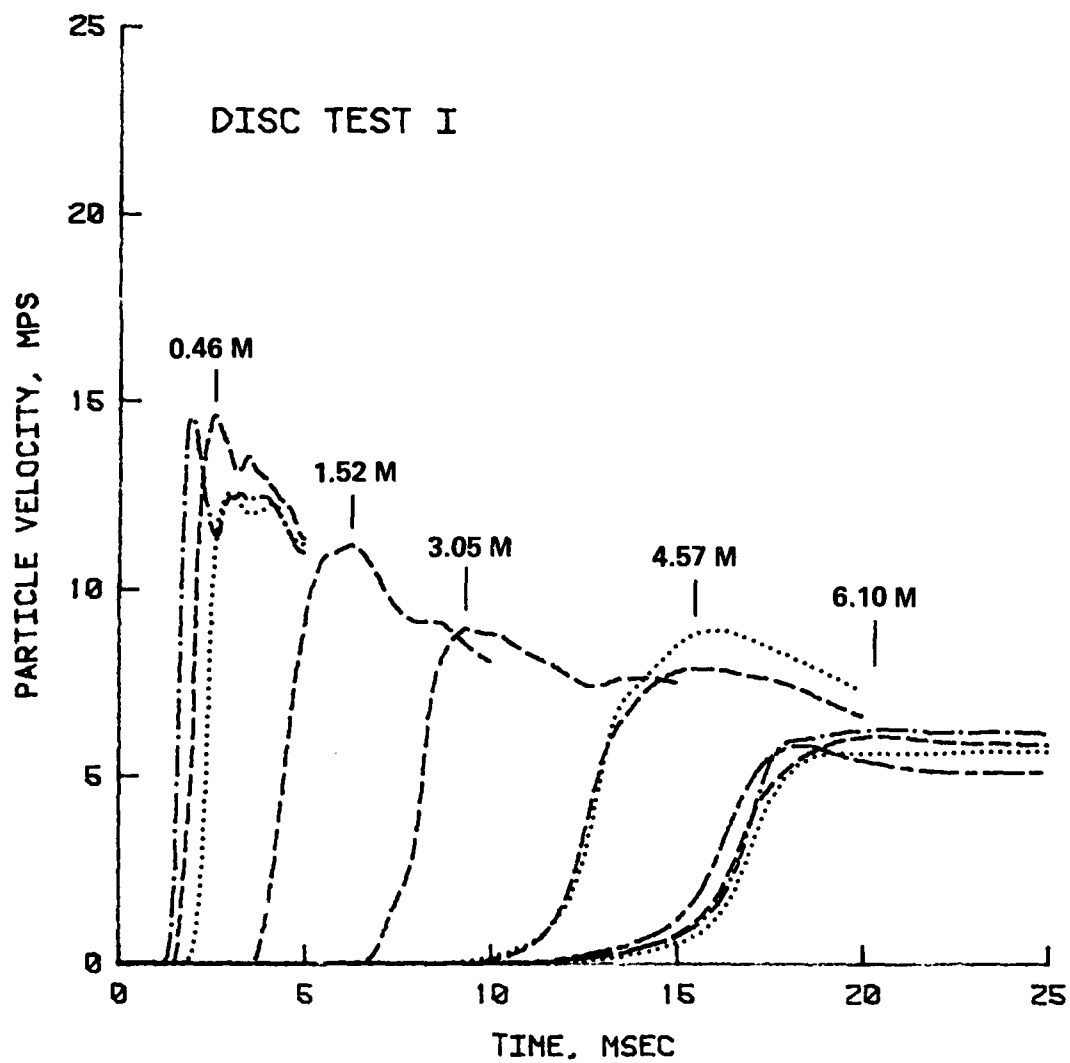

VIEWGRAPH 15


SITE: DISC TEST I

DEPTH INTERVAL: 1.5-5.9 meters

$V_p = 686$ mps

DENSITY = 1.860 g/cc

LEGEND: ----- Seismic Compressibility
 ————— Expected Value of Dynamic
 Laboratory Compressibility
 —○— In-situ Compressibility from
 Particle Velocity Measurements

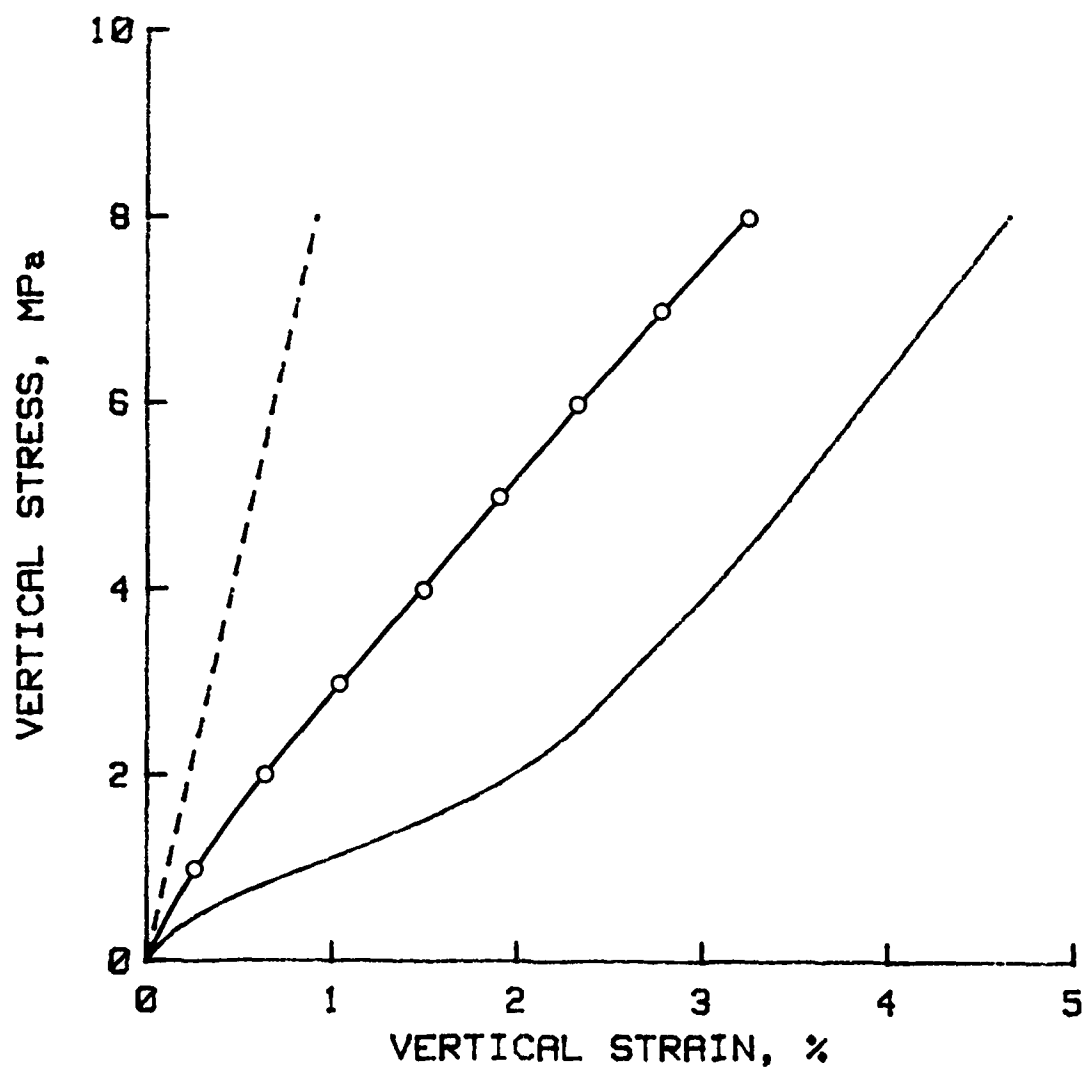


SITE: DISC TEST I

DEPTH INTERVAL: 1.5-5.9 meters


$V_p = 686$ mps


DENSITY = 1.860 g/cc

LEGEND: - - - - - Seismic Compressibility
 - - - - - Expected Value of Dynamic
 Laboratory Compressibility
 -○- In-situ Compressibility from
 Particle Velocity Measurements

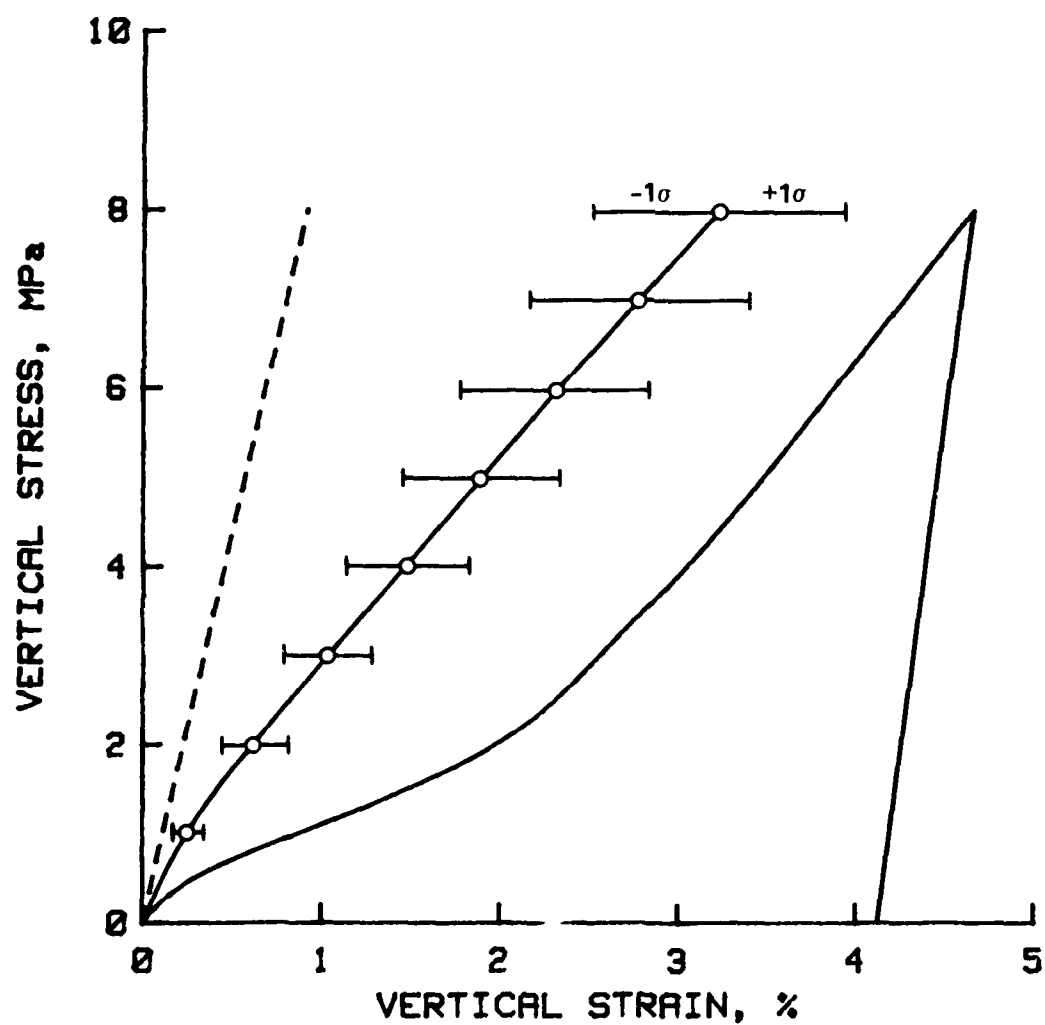





VIEWGRAPH 17

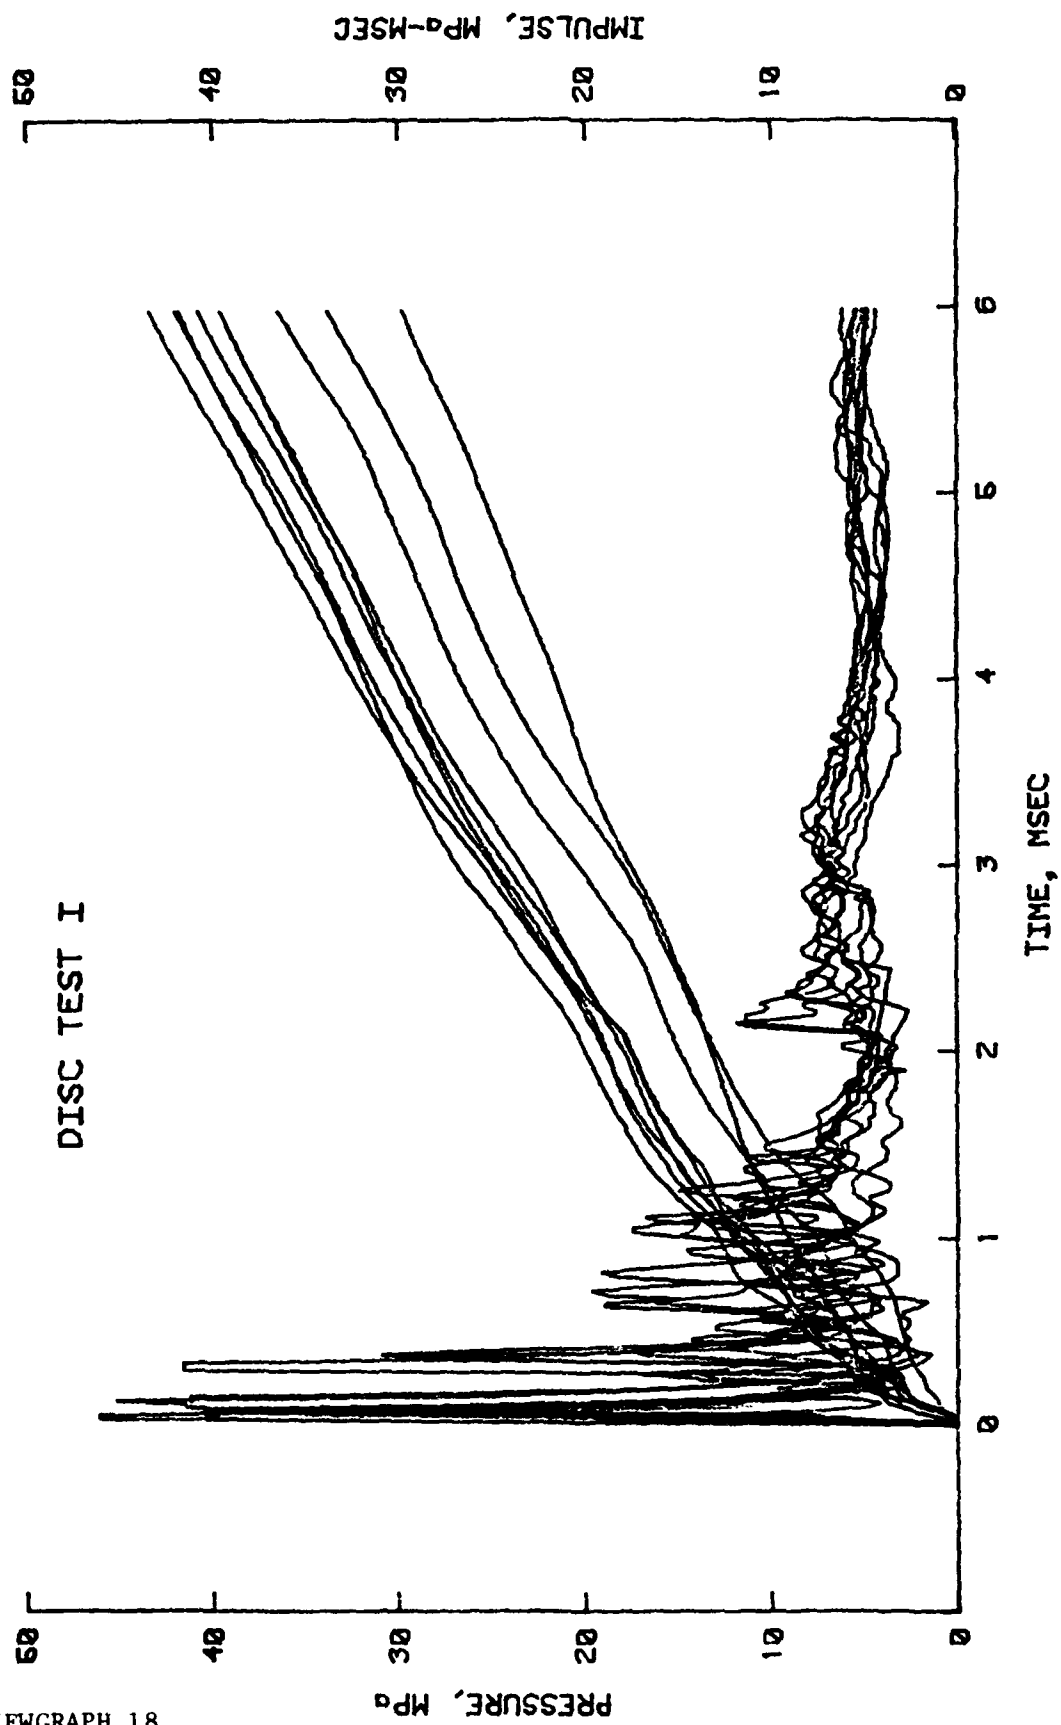

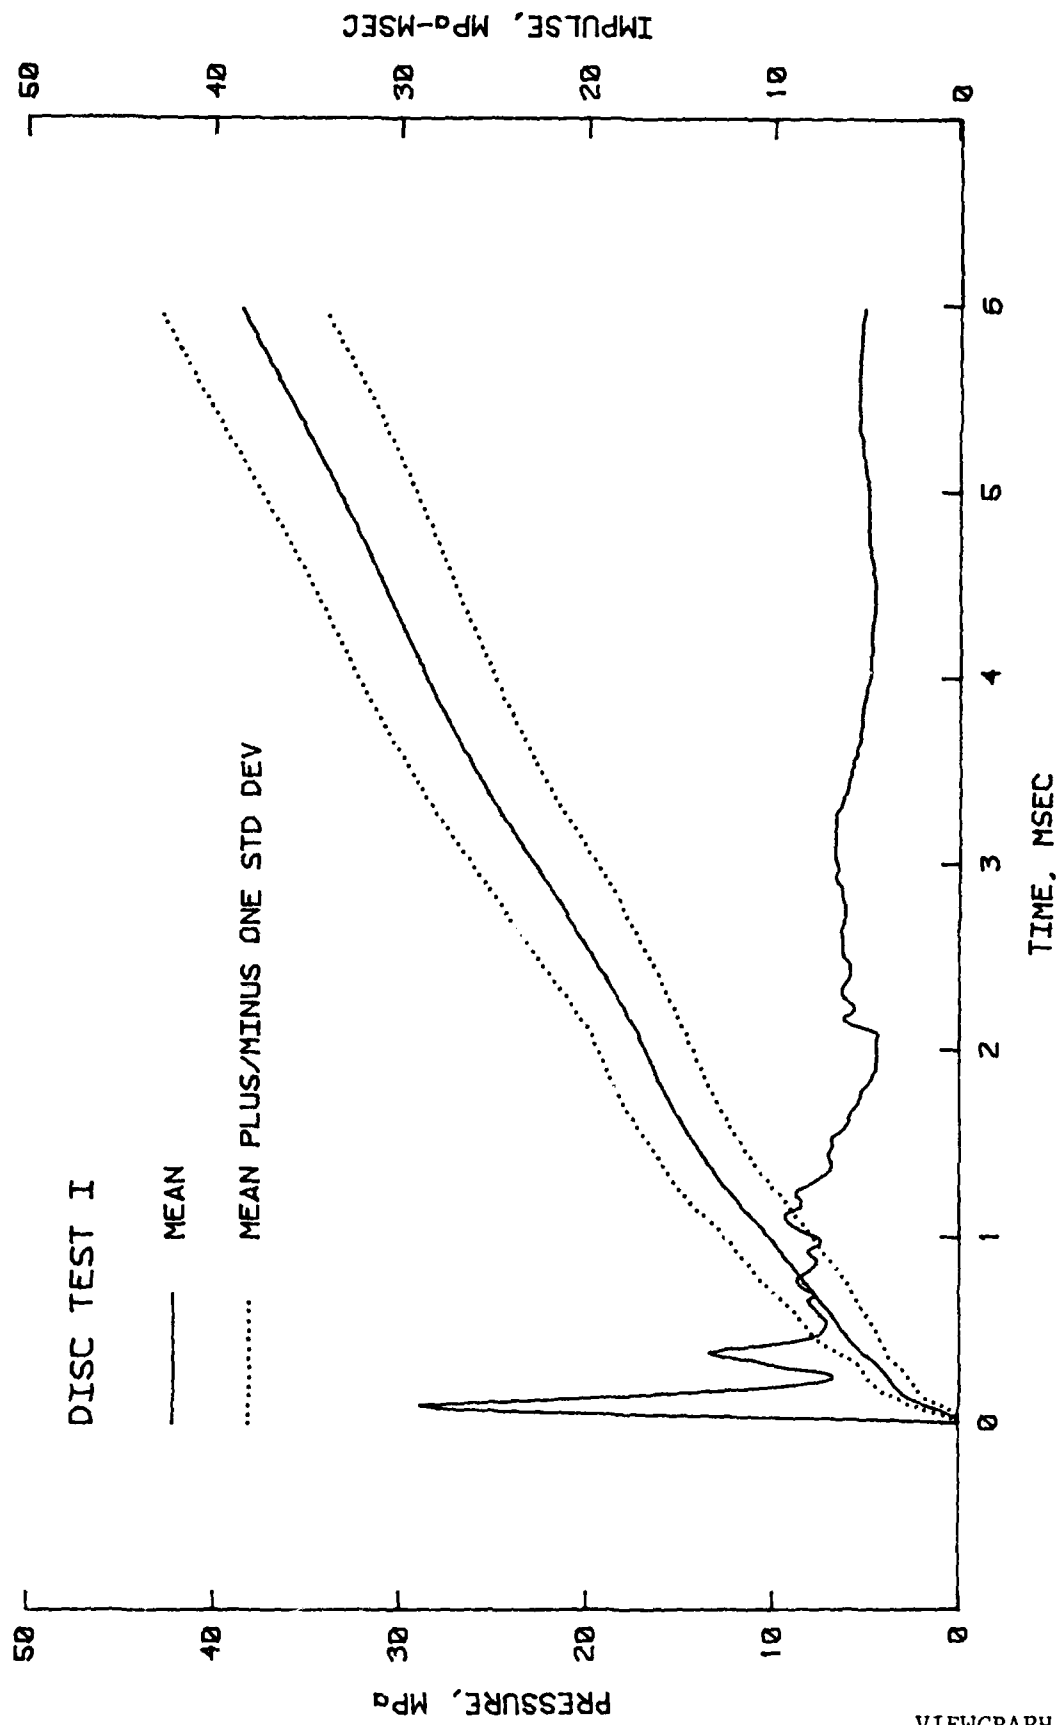


VIEWGRAPH 19

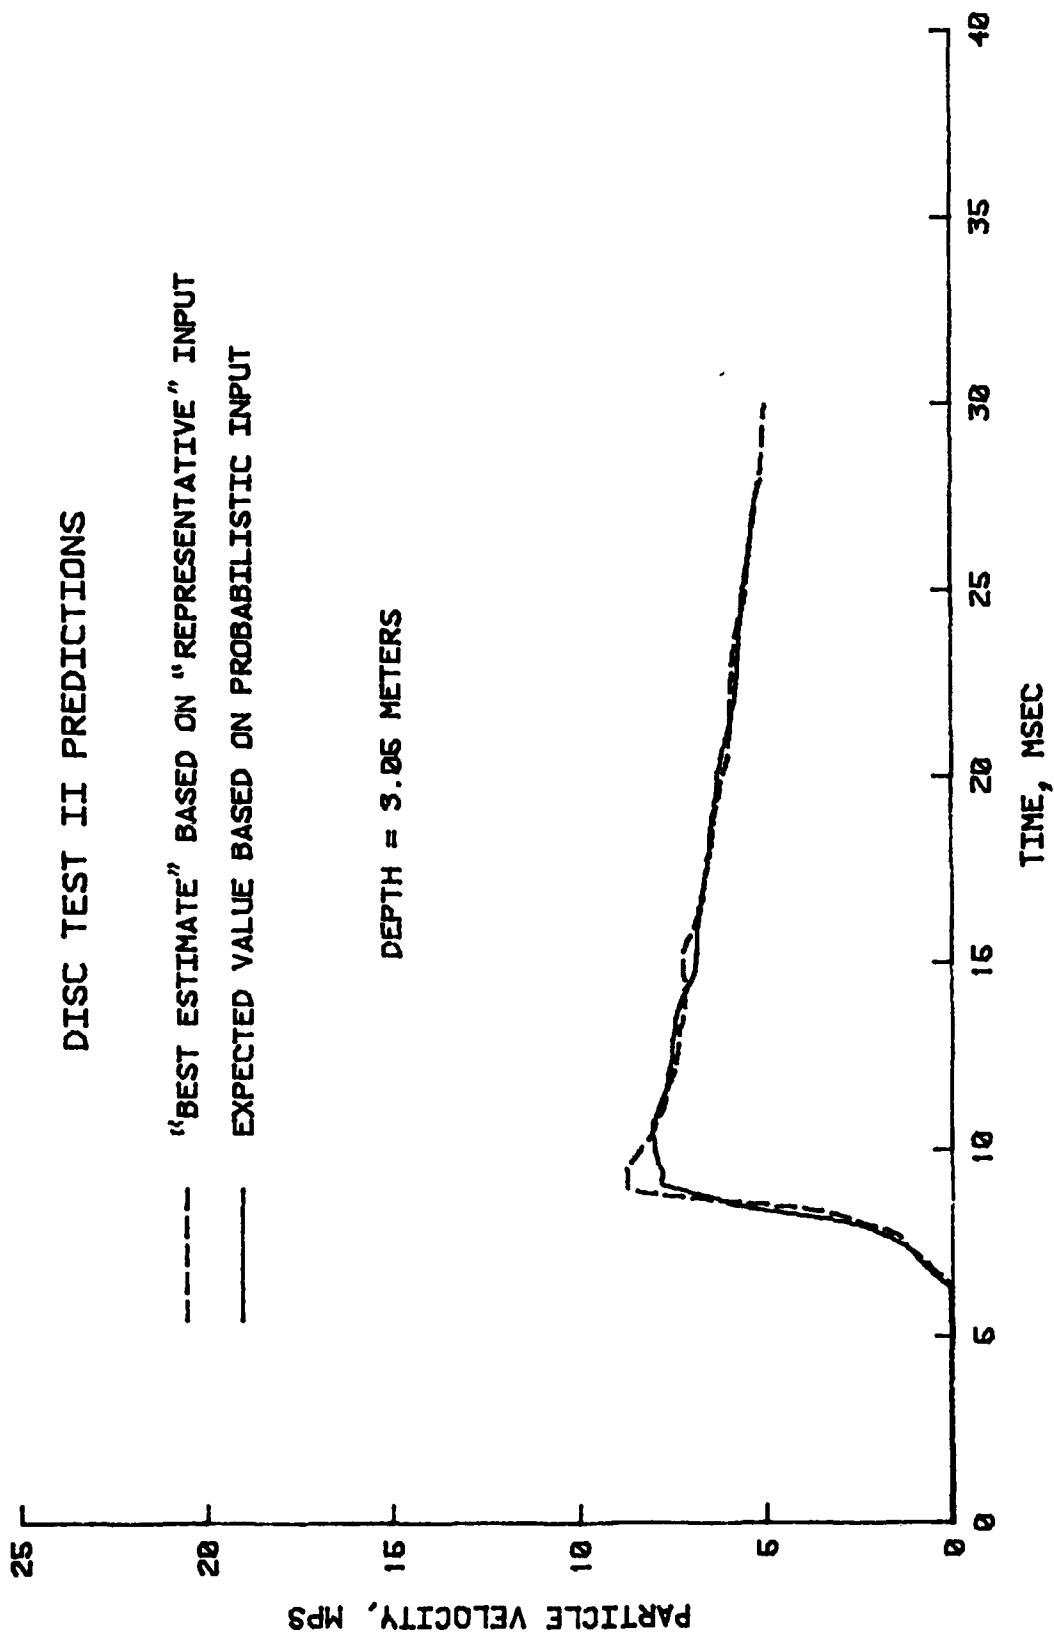


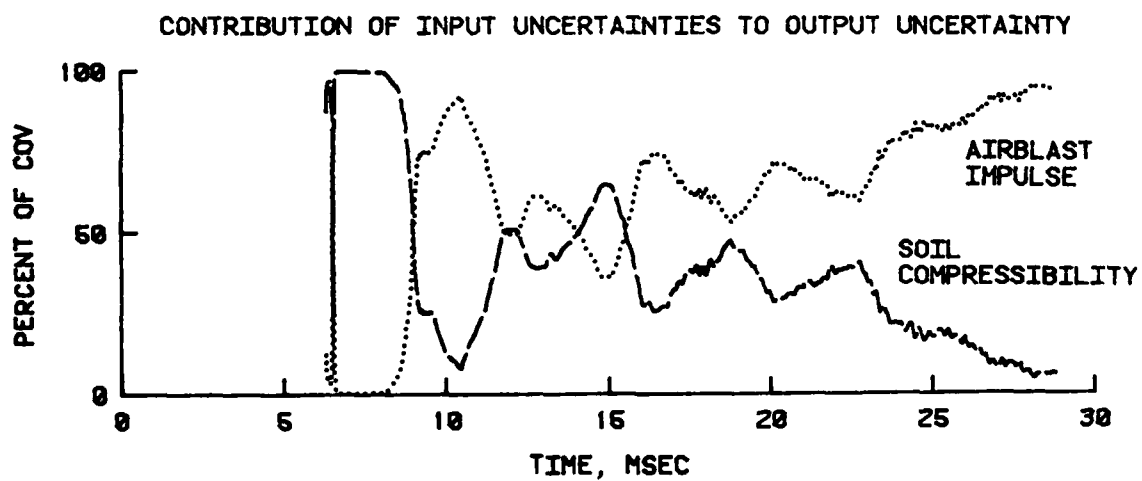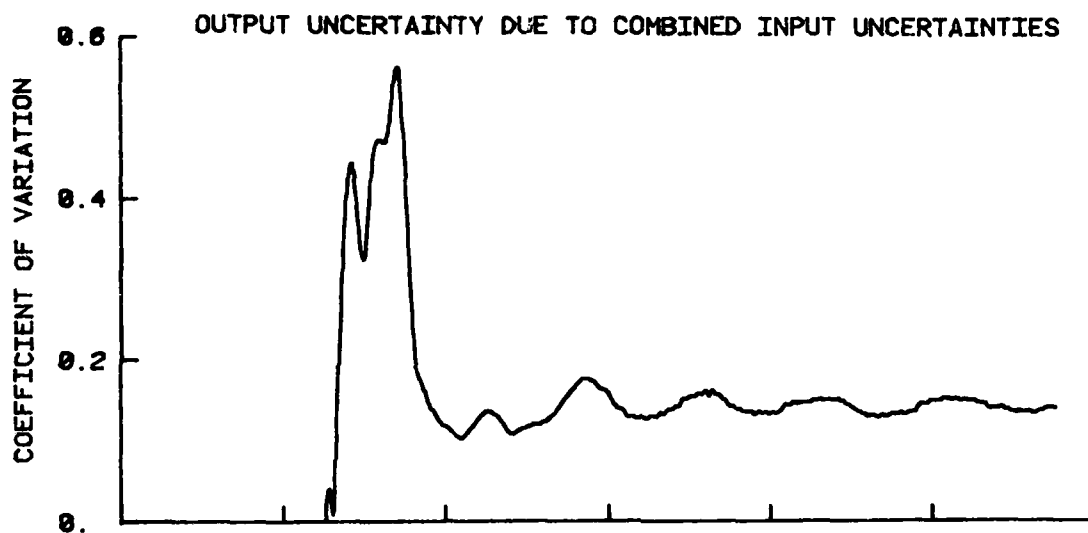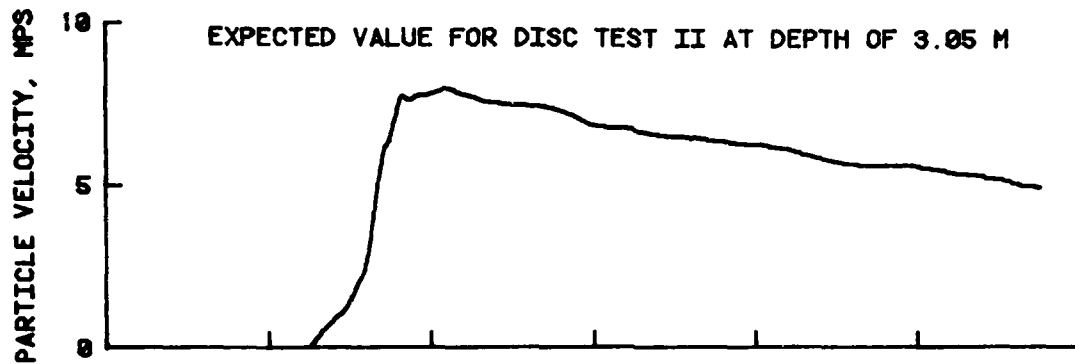

VIEWGRAPH 21

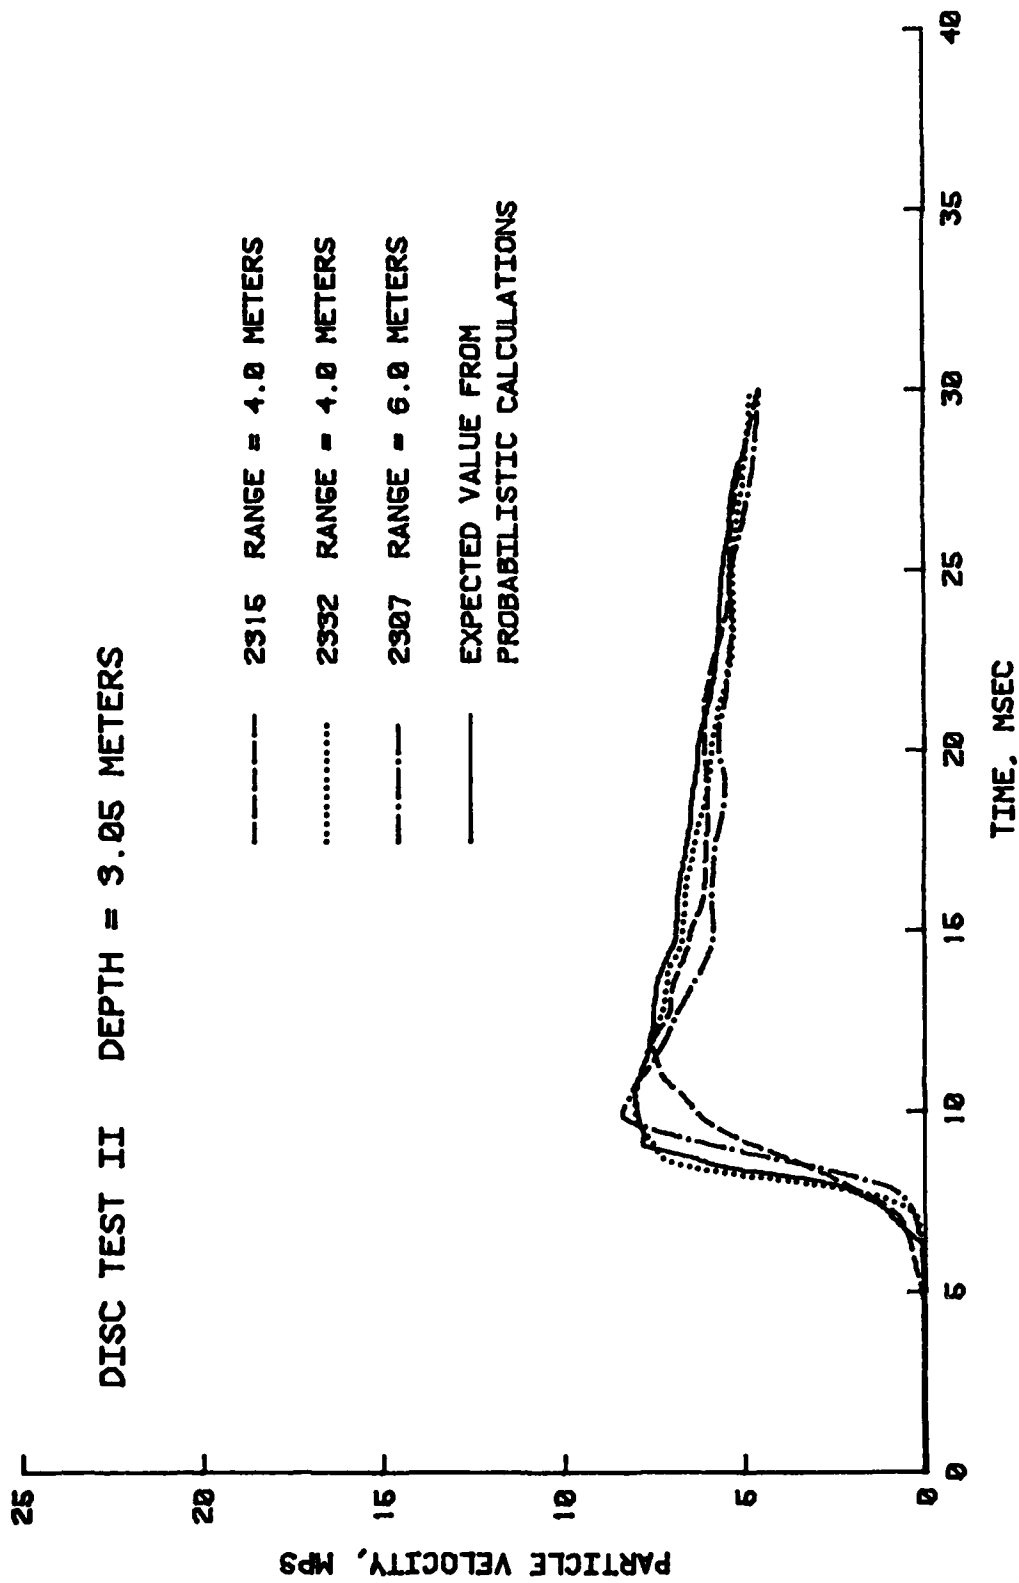

DISC TEST II DEPTH = 3.05 METERS

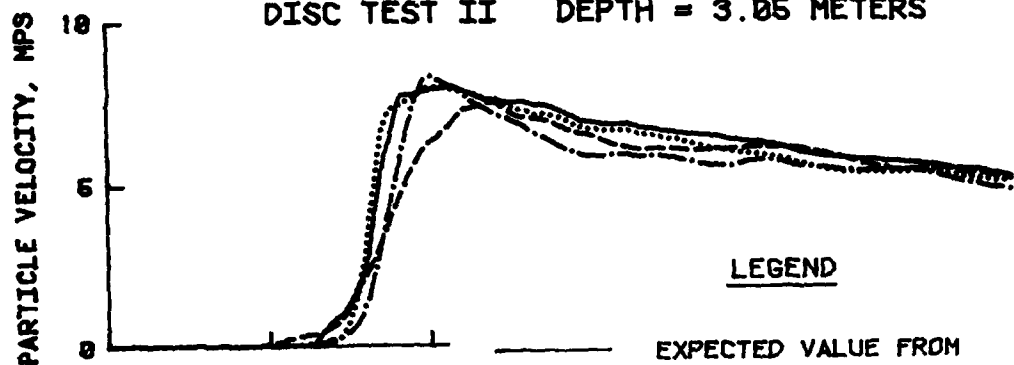



LEGEND



EXPECTED VALUE FROM
PROBABILISTIC CALCULATIONS

2315 RANGE = 4.0 M

2332 RANGE = 4.0 M

2307 RANGE = 6.0 M

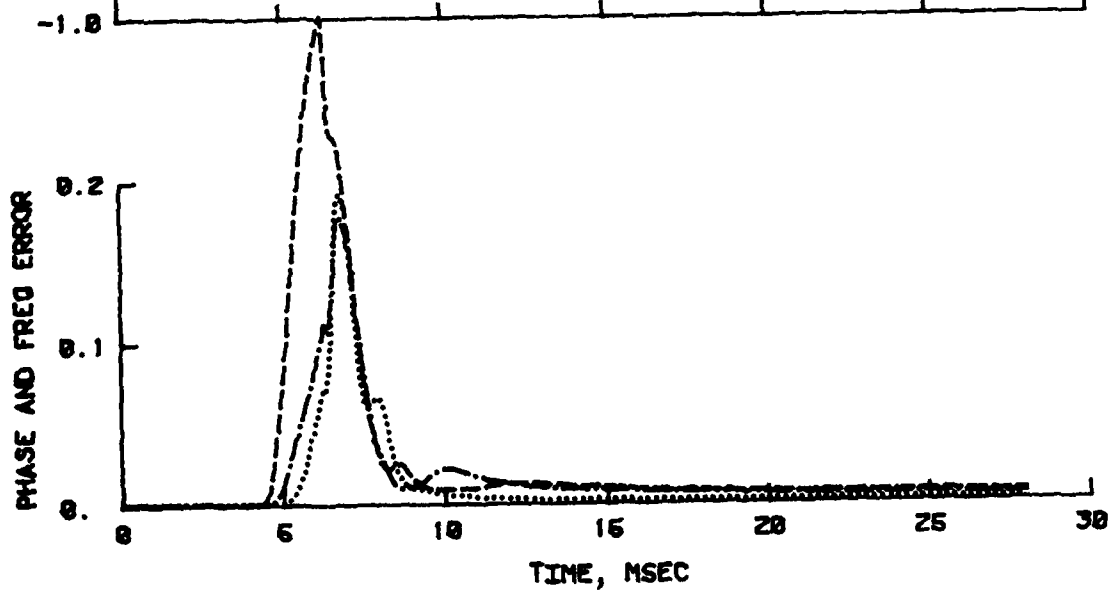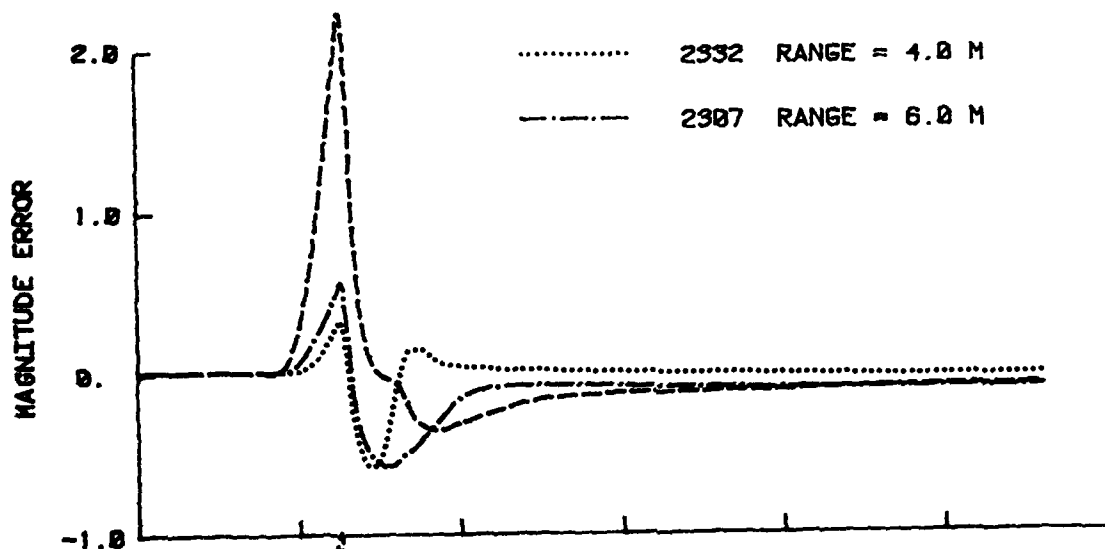


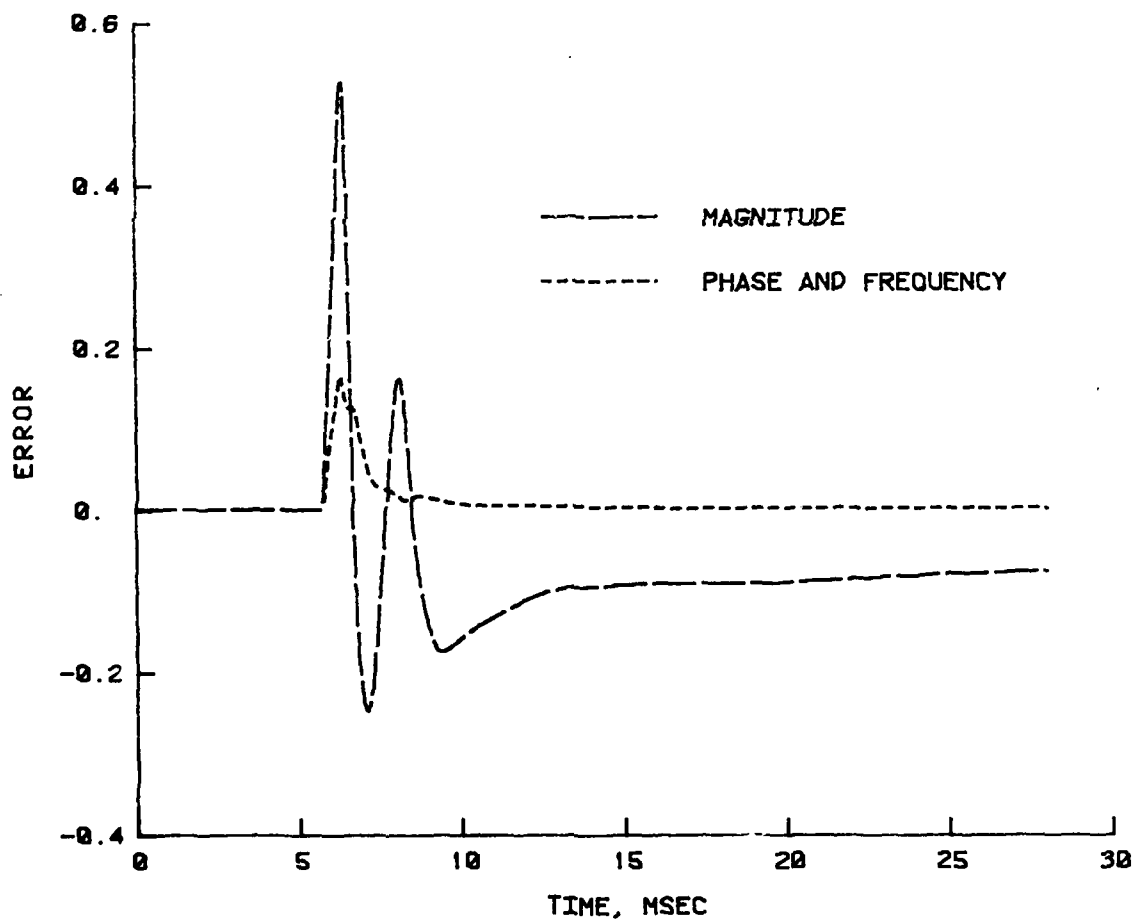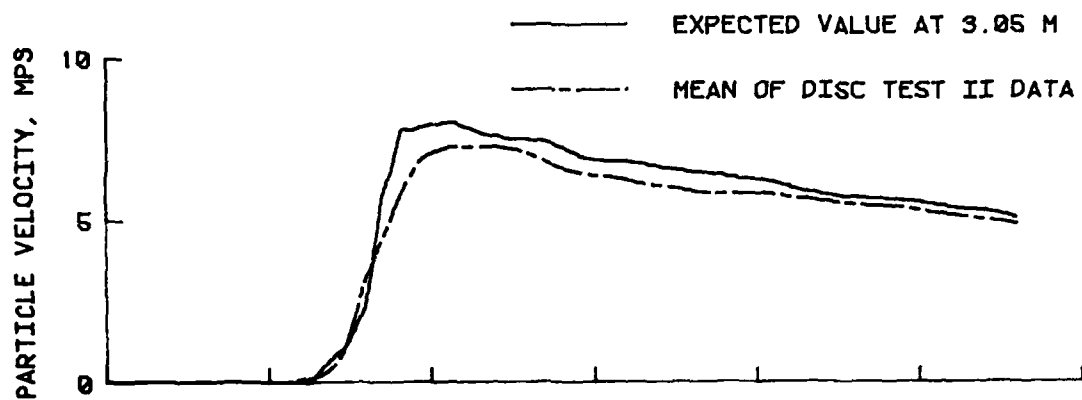

VIEWGRAPH 24

DISC TEST II PREDICTIONS

DEPTH = 3.05 METERS

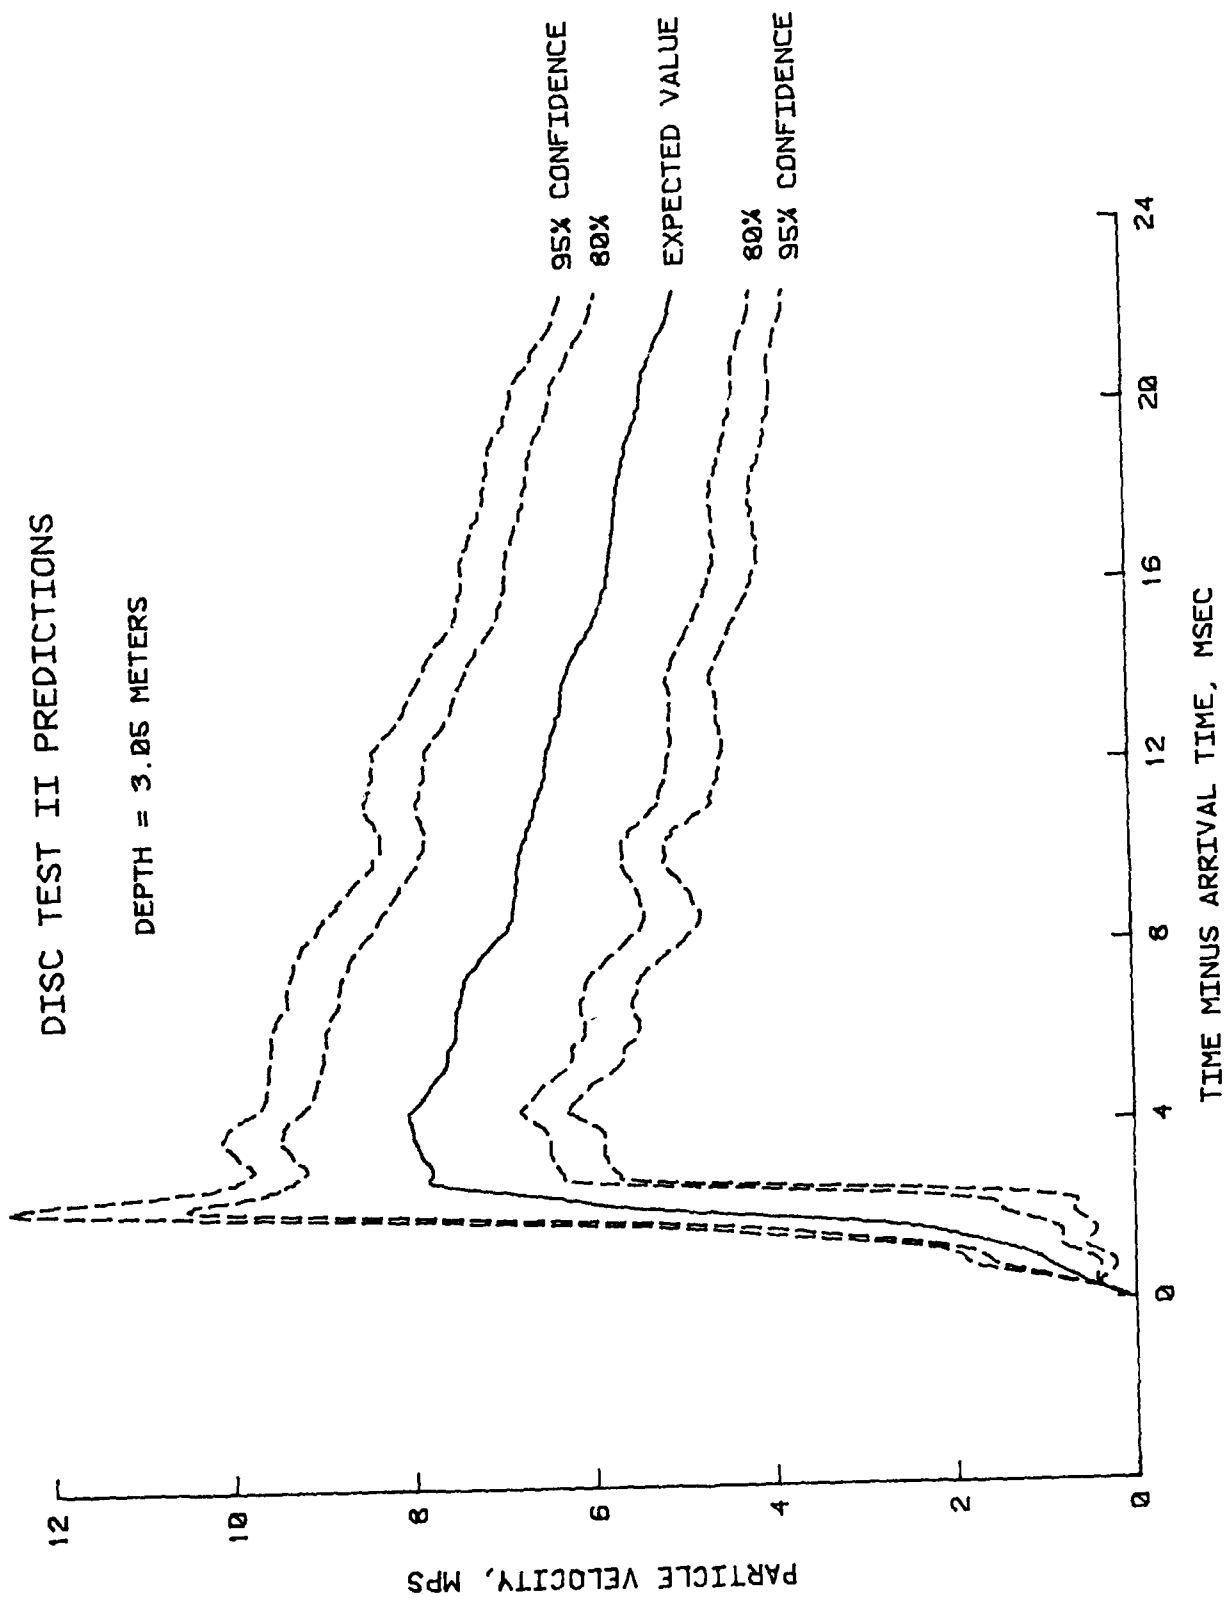

VIEWGRAPH 25

DISTRIBUTION LIST

Address	No. of Copies
<u>DEPARTMENT OF DEFENSE</u>	
Director Defense Nuclear Agency Washington, DC 20305	
ATTN: DDST (Eugene Sevin)	1
SPSS (D. A. Linger)	1
SPSS (G. W. Ullrich)	2
SPSS (K. L. Goering)	1
Technical Library	1
Director Defense Advanced Research Project Agency 1400 Wilson Blvd. Arlington, VA 22209	
ATTN: Technical Library	1
Director Defense Intelligence Agency Washington, DC 20301	
ATTN: Technical Library	1
Defense Technical Information Center Cameron Station Alexandria, VA 22314	
ATTN: TC (Myer B. Kahn)	12
Commander Field Command, Defense Nuclear Agency Kirtland Air Force Base, NM 87115	
ATTN: B. L. Ristvet	1
Test Construction Division Field Command Test Directorate, Defense Nuclear Agency P. O. Box 208 Mercury, NV 89023	
ATTN: FCTC (J. W. LaComb)	1
Under Secretary of Defense for Research and Engineering Department of Defense Washington, DC 20301	
ATTN: M. C. Atkins	1

Address	No. of Copies
<u>DEPARTMENT OF THE ARMY</u>	
Commander U. S. Army Corps of Engineers Washington, DC 20314	
ATTN: DAEN-RDL	1
DAEN-RDM (J. J. Healy)	1
DAEN-MPE-T (R. L. Wight)	1
DAEN-ASI-L	2
Corps of Engineers MX Project Agency Norton Air Force Base, CA 92409	
ATTN: MXPDD (Ralph Wheeler)	1
Commander U. S. Army Engineer Division, Huntsville P. O. Box 1600, West Station Huntsville, AL 35807	
ATTN: HNDED-SR	1
Director U. S. Army Construction Engineering Research Laboratory P. O. Box 4005 Champaign, IL 61820	
ATTN: Technical Library	1
Commander/Director U. S. Army Cold Regions Research and Engineering Laboratory P. O. Box 282 Hanover, NH 03755	
ATTN: Technical Library	1
Commandant U. S. Army Engineer School Ft. Belvoir, VA 22060	
ATTN: Technical Library	1
Commander Ballistic Missile Defense Systems Command Department of the Army P. O. Box 1500 Huntsville, AL 35807	
ATTN: BMDSC-HL (T. M. Perdue)	1
BMDSC-HLE (R. C. Webb)	1
Commander Harry Diamond Laboratories Department of the Army 2800 Powder Mill Road Adelphi, MD 20783	
ATTN: Technical Library	1

<u>Address</u>	<u>No. of Copies</u>
<u>DEPARTMENT OF THE ARMY (CONTINUED)</u>	
Director U. S. Army Ballistic Research Laboratory Aberdeen Proving Ground, MD 21005 ATTN: Technical Library	1
Commander U. S. Army Nuclear and Chemical Agency 7500 Backlick Road, Bldg 2073 Springfield, VA 22150 ATTN: Technical Library	1
Deputy Chief of Staff for Research, Development and Acquisition Department of the Army Washington, DC 20310 ATTN: Technical Library	1
Commander Army Materials and Mechanics Research Center Watertown, MA 02172 ATTN: Technical Library	1
<u>DEPARTMENT OF THE NAVY</u>	
Naval Civil Engineering Laboratory Port Hueneme, CA 93043 ATTN: Technical Library	1
Naval Facilities Engineering Command 200 Stovall Street Alexandria, VA 22332 ATTN: Technical Library	1
Naval Postgraduate School Department of Operations Research Monterey, CA 93940 ATTN: G. F. Lindsay	1
Strategic Systems Project Office Department of the Navy Washington, DC 20376 ATTN: Technical Library	1

Address	No. of Copies
<u>DEPARTMENT OF THE AIR FORCE</u>	
Air Force Armament Laboratory (AFSC) Eglin Air Force Base, FL 32542 ATTN: Technical Library	1
Air Force Engineering and Services Center Tyndall Air Force Base, FL 32403 ATTN: Technical Library	1
Air Force Geophysics Laboratory (AFSC) Hanscom Air Force Base, MA 01731 ATTN: Technical Library	1
Air Force Institute of Technology Air University Wright-Patterson Air Force Base, OH 45433 ATTN: Technical Library	1
Air Force Office of Scientific Research Bolling Air Force Base, DC 20332 ATTN: AFOSR/NA (J. J. Allen)	1
Air Force Weapons Laboratory (AFSC) Kirtland Air Force Base, NM 87117 ATTN: NTE (M. A. Plamondon) NTESG (E. J. Rinehart) NTESG (J. N. Thomas) Technical Library	1 1 1 1
Air Force Regional Civil Engineer-MX Norton Air Force Base, CA 92409 ATTN: DEE (G. M. Riddle) DEEC (J. L. Jack)	1 1
Commander Ballistic Missile Office (AFSC) Norton Air Force Base, CA 92409 ATTN: ENSN (D. H. Gage) ENSN (A. R. Schenker, Jr.)	1 1
Deputy Chief of Staff for Research, Development and Acquisition Department of the Air Force Washington, DC 20330 ATTN: Technical Library	1

Address	No. of Copies
<u>OTHER GOVERNMENT AGENCIES</u>	
U. S. Geological Survey Branch of Astrogeological Studies 2255 North Gemini Drive Flagstaff, AZ 86001 ATTN: D. J. Roddy	1
Federal Emergency Management Agency 1725 I Street, NW Washington, DC 20472 ATTN: Technical Library	1
Lawrence Livermore National Laboratory P. O. Box 808 Livermore, CA 94550 ATTN: Technical Library	1
Los Alamos National Laboratory P. O. Box 1663 Los Alamos, NM 87545 ATTN: Technical Library	1
Nuclear Regulatory Commission Directorate of Licensing Regulations Washington, DC 20555 ATTN: L. W. Heller	1
Sandia National Laboratory P. O. Box 5800 Albuquerque, NM 87185 ATTN: Technical Library	1
<u>OTHERS</u>	
A. H-S. Ang & Associates 402 Yankee Ridge Road Urbana, IL 61801 ATTN: A. H-S. Ang	1
Aerospace Corporation P. O. Box 92957 Los Angeles, CA 90009 ATTN: Technical Library	1
Agbabian Associates 250 N. Nash Street El Segundo, CA 90245 ATTN: M. S. Agbabian	1

<u>Address</u>	<u>No. of Copies</u>
<u>OTHERS (CONTINUED)</u>	
Applied Research Associates, Inc. 2101 San Pedro Blvd., NE-- Suite A Albuquerque, NM 87110 ATTN: J. L. Bratton	1
Applied Research Associates, Inc. New England Division Johnson Hill Road, RFD#1 South Royalton, VT 05068 ATTN: J. D. Shinn	1
Applied Theory, Inc. 930 S. La Brea Avenue Los Angeles, CA 90036 ATTN: J. G. Trulio	1
Boeing Aerospace Company P. O. Box 3999, Mail Stop 13-11 Seattle, WA 98124 ATTN: R. L. Dyrda J. C. Pyle	1 1
California Research and Technology, Inc. 6269 Variel Avenue, Suite 200 Woodland Hills, CA 91367 ATTN: K. N. Kreyenhagen S. H. Schuster M. H. Wagner	1 1 1
California Research and Technology, Inc. 4049 First Street Livermore, CA 94559 ATTN: D. L. Orphal	1
Ertec Western, Inc. P. O. Box 7765 Long Beach, CA 90807 ATTN: S. H. Madsen	1
Georgia Institute of Technology School of Civil Engineering Atlanta, GA 30332 ATTN: J. S. Lai	1
IIT Research Institute 10 W. 35th Street Chicago, IL 60616 ATTN: Technical Library	1

<u>Address</u>	<u>No. of Copies</u>
<u>OTHERS (CONTINUED)</u>	
J. D. Haltiwanger Consulting Services Room 106A Civil Engineering Building 208 North Romine Street Urbana, IL 61801 ATTN: W. J. Hall	1
J. H. Wiggins Company, Inc. 1650 South Pacific Coast Highway Redondo Beach, CA 90277 ATTN: J. D. Collins	1
Karagozian and Case 6330 North Figueroa Street Los Angeles, CA 90042 ATTN: John Karagozian	1
Lockheed Missiles and Space Company, Inc. 3251 Hanover Street Palo Alto, CA 94304 ATTN: T. L. Geers	1
Massachusetts Institute of Technology Department of Civil Engineering, Room 1-346 Cambridge, MA 02139 ATTN: E. H. Vanmarcke	1
Merritt Cases, Inc. P. O. Box 1206 Redlands, CA 92373 ATTN: J. L. Merritt	1
New Mexico Engineering Research Institute University of New Mexico Box 25, University Station Albuquerque, NM 87131 ATTN: Technical Library	1
Pacific-Sierra Research Corporation 1456 Cloverfield Blvd. Santa Monica, CA 90404 ATTN: H. L. Brode	1
Pacifica Technology P. O. Box 148 Del Mar, CA 92014 ATTN: R. T. Allen	1

<u>Address</u>	<u>No. of Copies</u>
<u>OTHERS (CONTINUED)</u>	
Patel Enterprises, Inc. P. O. Box 3531 Huntsville, AL 35810 ATTN: M. C. Patel	1
Physics International Company 2700 Merced Street San Leandro, CA 94577 ATTN: F. M. Sauer J. M. Thomsen	1 1
R&D Associates P. O. Box 9695 Marina del Rey, CA 90291 ATTN: R. J. Port J. G. Lewis	1 1
R&D Associates 1401 Wilson Boulevard, Suite 500 Arlington, VA 22209 ATTN: H. F. Cooper, Jr.	1
Rensselaer Polytechnic Institute Department of Civil Engineering Troy, NY 12181 ATTN: D. A. Grivas	1
Shannon and Wilson, Inc. 1105 North 38th Street Seattle, WA 98103 ATTN: E. A. Sibley	1
SRI International 333 Ravenswood Ave. Menlo Park, CA 94025 ATTN: Lynn Seaman	1
Systems, Science and Software, Inc. P. O. Box 1620 La Jolla, CA 92038 ATTN: K. D. Pyatt	1
Terra Tek, Inc. 420 Wakara Way Salt Lake City, UT 84108 ATTN: A. Abou-sayed	1

<u>Address</u>	<u>No. of Copies</u>
<u>OTHERS (CONTINUED)</u>	
TRW Defense and Space Systems Group One Space Park Redondo Beach, CA 90278 ATTN: Norman Lipner	1
TRW Defense and Space Systems Group P. O. Box 1310 San Bernardino, CA 92402 ATTN: J. J. Farrell Richard Cramond, Jr.	1 1
Weidlinger Associates, Consulting Engineers 333 Seventh Avenue New York, NY 10001 ATTN: M. L. Baron Ivan Sandler	1 1
Weidlinger Associates, Consulting Engineers 3000 Sand Hill Road Menlo Park, CA 94025 ATTN: Jeremy Isenberg	1
University of Michigan Department of Civil Engineering Ann Arbor, MI 48104 ATTN: F. E. Richart	1

In accordance with letter from DAEN-RDC, DAEN-ASI dated 22 July 1977, Subject: Facsimile Catalog Cards for Laboratory Technical Publications, a facsimile catalog card in Library of Congress MARC format is reproduced below.

Jackson, J. G.

Site characterization for probabilistic ground shock predictions / by J.G. Jackson, Jr. (Structures Laboratory, U.S. Army Engineer Waterways Experiment Station). -- Vicksburg, Miss. : The Station ; Springfield, Va. : available from NTIS, 1982.

11, 25 p. : ill. ; 27 cm. -- (Miscellaneous paper ; SL-82-8)

Cover title.

"July 1982."

Final report.

"Prepared for Defense Nuclear Agency under Task H53BAXSX, Work Unit 00014."

Bibliography: p. 10-11.

1. Blast effect. 2. Explosions. 3. Shock waves.
4. Soil mechanics. I. United States. Defense Nuclear Agency. II. U.S. Army Engineer Waterways Experiment

Jackson, J. G.

Site characterization for probabilistic ground : ... 1982.
(Card 2)

Station. Structures Laboratory. III. Title IV. Series:
Miscellaneous paper (U.S. Army Engineer Waterways
Experiment Station) ; SL-82-8.
TA7.W34m no.SL-82-8